



BUNKER 15 ROUND SENSOR SL7272 - 15W

LED 15 watt surface mount round shaped bunker, IP54 with PIR sensor

Application



A robust solution for residential and apartment interior or exterior spaces

Design Specifications

- Durable UV resistant white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt with PIR sensor control, fixed 30 seconds ON
- Max. 7 metres detection distance, daylight threshold > 20 lux
- CRI > 80, 1050lm
- Quick connect installation design
- Robust IK06 protection, double insulation




Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	SL7272CW/WH/S	240	15	1050	4000	80
	SL7272CWBK/S	240	15	1050	4000	80

Beam Angle (°)	Body Colour	Dim (mm)
110	WHITE	182(W) x 68(H)
110	BLACK	182(W) x 68(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Dimensions

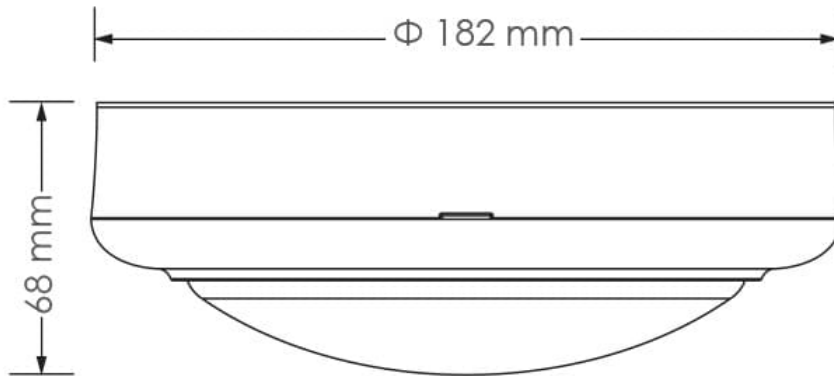

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SL7272CW/WH/S at 4000K





PIXIE AMBIENCE, CHANGE YOUR COLOUR TO MATCH YOUR STYLE.

The innovative PIXIE AMBIENCE SWITCH PLATES have been designed with the end user and installer in mind, allowing you to change the colour face plate as fashion demands.

For more
information
please
scan me

