



FLEXI STREAMLINE 24V TC SELECTABLE KITS - 2/5/10M


TC selectable strip kits available in 2, 5 or 10m length , CRI90

Application

Perfect for the home or commercial, feature lighting application

Design Specifications

- Choice of 2 metre (15W), 5 metre (35W) or 10 metre (60W) kits
- TC selectable 2700, 4000, 6000K
- Streamline COB LED technology, providing a smooth lighting profile
- Beam distribution 140° , CRI90, 560 LED's per metre
- Remote (IP20) non-dimmable driver included with flex and plug for easy installation
- Cutable (every 50mm), note when cutting LED strips, it is always important to calculate the remaining LED load to reconfirm its compatibility with the existing driver, as driver changes may be required with moderate reduction in loads. [LED channel options refer this section](#)

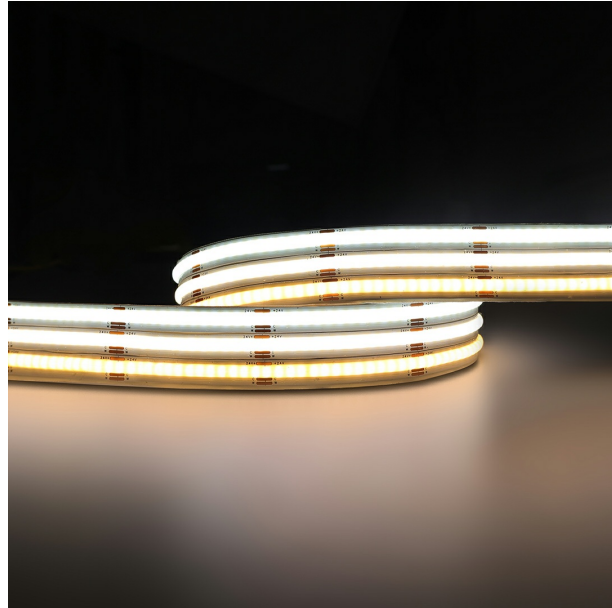

Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Beam Angle (°)	CRI	Lumens (lm)
	FLBP24V2M/TC	240	15	140	90	500/560/610
	FLBP24V5M/TC	240	35	140	90	500/560/610
	FLBP24V10M/TC	240	60	140	90	500/560/610
	FLC08TC/KIT	24				
	PLUTO15TC24V	240	15			
	PLUTO40TC24V	240	40			
	PLUTO60TC24V	240	60			

LEDs Per Metre	Cutting Interval	CCT (K)	Body Colour	Dim (mm)
560	50	2700/4000/6000	SILICON	2000(L) x 8(W) x 1.7(H)
560	50	2700/4000/6000	SILICON	5000(L) x 8(W) x 1.7(H)
560	50	2700/4000/6000	SILICON	10000(L) x 8(W) x 1.7(H)
			BLUE	
			BLUE	
			BLUE	

NOTE: Pluto 15/40/60TC drivers are only compatible with SAL FLEXI Streamline FLBP24V/TC strip

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions



WARNING: IN THE INTEREST OF PRODUCT PERFORMANCE AND SAFETY PLEASE READ THIS INSTALLATION INSTRUCTIONS BEFORE INSTALLING THE PRODUCT.

IMPORTANT: ALWAYS USE A LICENSED ELECTRICIAN.

SAL products are designed in accordance with all mandatory international and IEC/EN standards, which require installation in accordance with IEC/EN 60598-1 by qualified installers and require correct wiring and termination of the equipment. Products are not to be connected with the following terminations and SAL standard terms and conditions of sale, available on www.sal.net.au. From technical product data and dimensions tables, available on the company website, and from technical data on technical performance and safety data sheets, available on the company website, and from technical data on technical performance and safety data sheets, available on the company website.

WIRE DATA

PRODUCT REFERENCE: A FOUR-WIRE STRIP SYSTEM TO ACCOMMODATE THE LED DRIVER.

