



LED DOWNLIGHTS



www.sal.net.au

LED DOWNLIGHT S9651 PUNNET



S9651/70

S9651/125

S9651/175



CONSTRUCTION

- Die Cast Aluminium body
- Square bezel combined with round body to suit round cut out
- Matt powder coated finish
- High efficiency prismatic diffuser
- Unique profile designed to maximise uniformity & minimise glare

IP RATING

- IP44 weatherproof front only


DIMMING OPTIONS

- Analogue dimming (trailing edge, 1-10V)
- Digital dimming (DSI, DALI)

APPLICATIONS

- Museum, art gallery, commercial applications

DIMENSIONS

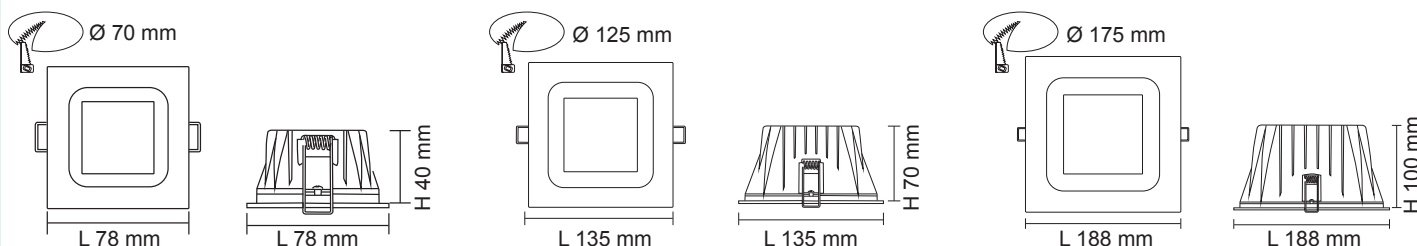

STANDARD COLOUR TEMPERATURE

- 4000K Cool White


COLOUR TEMPERATURE OPTIONS

- 3000K Warm white
- 6000K Daylight

Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Fitting Colour
S9651/70CW/WH7W	240V	7W	800lm	4000K	>80	80°	White
S9651/70CW/WH10W	240V	10W	1000lm	4000K	>80	80°	White
S9651/125CW/WH20W	240V	20W	2000lm	4000K	>80	80°	White
S9651/125CW/WH30W	240V	30W	2800lm	4000K	>80	80°	White
S9651/175CW/WH35W	240V	35W	3500lm	4000K	>80	80°	White
S9651/175CW/WH50W	240V	50W	4800lm	4000K	>80	80°	White

PHOTOMETRIC DATA Unit: cd C0/C180

S9651/70CW/WH7W S9651/70CW/WH10W S9651/125CW/WH20W S9651/125CW/WH30W S9651/175CW/WH35W S9651/175CW/WH50W

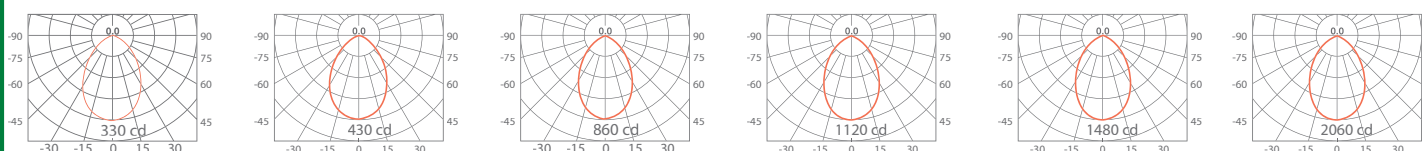

Specifications above are for reference only and may vary without prior notice