

**Head Office**

40 Biloela Street
Villawood NSW 2163
T +612 9723 3099
F +612 9724 1899

Victoria

46-48 Keys Road
Moorabbin VIC 3189
T +613 9532 3168
F +613 9532 1838

Queensland

13/258 Musgrave Road
Coopers Plains QLD 4108
T +617 3276 8897
F +617 3277 8817

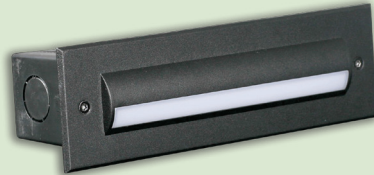
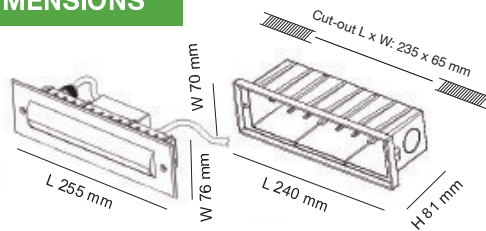
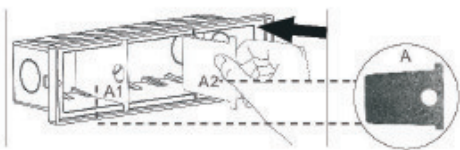
WA Agencies

Delta Lighting System
15 Hunt St. Malaga WA 6090
T +618 9249 4447
F +618 9249 2776



SE7137

MAXI BRICK LED EYELID WALL LIGHT

**DIMENSIONS**
SUPPORT CASE
PRE-CONSTRUCTION
INSTALLATION INSTRUCTIONS


- The picture-"A" is the support plate used for "mounting sleeve" during the construction installation process to prevent deformation of the support case.
- The loading way is as A1, A2
- Please remove the support plate (A1 & A2) from the "mounting sleeve" before installation.

TECHNICAL SPECIFICATIONS

Model No.	Input Voltage	Power	Luminous Flux	Colour Temp	CRI (Ra)	Fitting Colour	IK Rating
SE7137WW/BK	240V~50Hz	7W	50lm	3000K	>80	Black	09
SE7137WW/SL	240V~50Hz	7W	50lm	3000K	>80	Silver	09
SE7137CW/BK	240V~50Hz	7W	50lm	4000K	>80	Black	09
SE7137CW/SL	240V~50Hz	7W	50lm	4000K	>80	Silver	09

FEATURES

- Die-cast aluminium body and face cover
- Powder coated finish
- Opal polycarbonate diffuser
- High efficiency SMD LED chips
- Constant current LED driver fitted
- Moulding shaped silicone gasket
- IP68 PG9 PVC cable gland
- Stainless steel allen screws
- Installation ABS canister included
- IP65 weatherproof
- IK Rating: IK09
- COLOUR TEMPERATURE
3000K WARM WHITE
4000K COOL WHITE
- FITTING COLOUR
BLACK
SILVER

PHOTOMETRIC DATA

C0/C180: —
C90/C270: —

SE7137

