

**Head Office**

40 Biloela Street
Villawood NSW 2163
T +612 9723 3099
F +612 9724 1899

Victoria

46-48 Keys Road
Moorabbin VIC 3189
T +613 9532 3168
F +613 9532 1838

Queensland

13/258 Musgrave Road
Coopers Plains QLD 4108
T +617 3276 8897
F +617 3277 8817

WA Agencies

Delta Lighting System
15 Hunt St. Malaga WA 6090
T +618 9249 4447
F +618 9249 2776



SMS804CR


RECESSED STANDALONE INFRARED SENSOR



TECHNICAL SPECIFICATIONS

Model No.	SMS804CR
Operating Voltage	240V~50Hz
Switched Power	2000W Incandescent, 500W Fluorescent, 300W LED
Standby Power	<1W
Detection Angle	360°
Detection Distance	Max. radius 4.5 m when mounting at 3 m high
Duration Time	10 seconds to 4 mins adjustable
Lux Threshold	Adjustable for Dawn to Dusk operation
Sensor Principle	Infrared Sensor
Material	PC
Mounting Method	Recessed
Operating Temp	-10°C~40°C
IP Rating	20

DETECTION RANGE

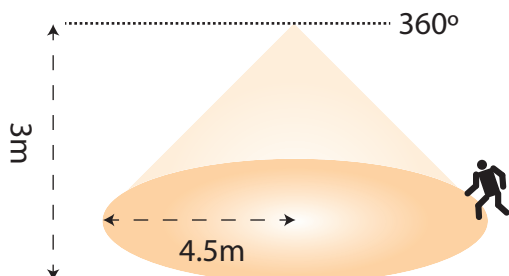

DIMENSIONS

