



## DALI 75/120/150


Australian approved, dimmable constant voltage, DALI 2.0 power supply

### Application

Reliable constant voltage dimmable driver with DALI 2.0 certified by DiiA

### Design Specifications

- Choice of 75 watt / 24V, 150 watt / 24V or 120 watt / 12V
- DALI 2.0 certified by DiiA
- Overload and short circuit protection, DALI and Push DIM control
- SELV and EMC compliant, fixed terminal termination
- flickerCONTROLLED technology
- Electrical class II, Do Not Cover.

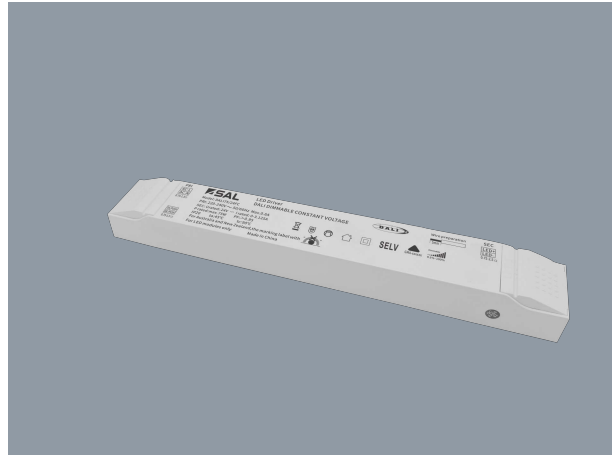

### Performance

- Dimmable - **YES**
- Dimmer Type - **DALI2**

### Technical Specification

Model No.	Input Voltage (V/AC)	Output Voltage (V/DC)	Power Factor	Power (W)	Dimmable	Dim (mm)
DALI75/24FC	240	24	0.95	75	YES	361(L) x 43(W) x 31(H)
DALI150/24FC	240	24	0.95	150	YES	361(L) x 43(W) x 31(H)
DALI120/12FC	240	12	0.95	120	YES	361(L) x 43(W) x 31(H)

NOTE: Before using the PUSH DIM function, please ensure the driver (L/N supply) is powered ON FIRST, to prevent damage to the PUSH DIM terminations.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

# THE SFI SYSTEM ELIMINATES LED FLICKERING.

**DIMMABLE  
CONTROL WITH  
SFI FLICKER  
CONTROL  
TECHNOLOGY**  
when paired with  
**SAL SFI downlights**



**DIM with  
FLICKER  
CONTROL**

For related  
products  
please  
scan me

