



ECOLINE TC DP SL9732 - 12/40W

LED narrow diffused batten with DUAL POWER design

Application

Conventional linear LED batten products for commercial service spaces with DUAL power design and SELECTABLE colour

Design Specifications

- 65 mm narrow steel body
- Quality white powder coat finish with robust polycarbonate diffuser
- Large terminal block for easy installation
- Integral constant current non-dimmable LED driver, DUAL Power 12/20 or 22/40 watt selections, with Selectable colour 3000/4000/5700K
- High efficiency SMD LED chips, CRI > 80, 120 degree beam distribution



Technical Specification


Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
SL9732/20TC/DP	LED DIFFUSED BATTEN 65X600 3/4/5.7K 12/20W	240	20	1200/1900	3000/4000/5700	80
SL9732/40TC/DP	LED DIFFUSED BATTEN 65X1135 3/4/5.7K 22/40W	240	40	2300/3800	3000/4000/5700	80

Model No.	Body Colour	Dimensions (mm)
SL9732/20TC/DP	WHITE	600(L) x 65(W) x 65(H)
SL9732/40TC/DP	WHITE	1135(L) x 65(W) x 65(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish.

Dimensions

SL9732 20

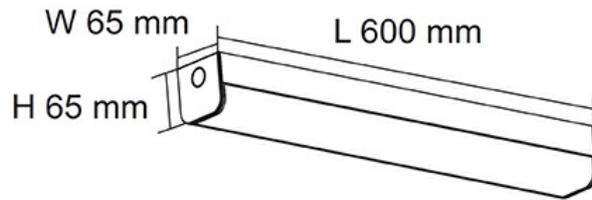

SL9732 40

