



## FLEXI FL2406/SS10-6W/M


CRI> 80 24V low voltage LED Strip IP65

### Application

A creative solution for residential and commercial interior spaces

### Design Specifications

- High efficiency SMD LED chips with 3M self-adhesive tapes at back, 6 watt/m
- Roll length 20m, maximum run 5m, cuttable every 100 mm at scissors symbol ✂
- Connection length can be extended by certain LED drivers, controllers and repeaters
- Dimmable with compatible controller or dimmable constant voltage LED driver. Dimming options -  
Type A - trailing edge dimmer  
Type B - LED Controller: LT8903DIM , LT8905DIM and LT8904DIM/RP  
Type C - 1-10V analogue
- Heat sink and 24V constant voltage LED driver required. LED channel options: SLT1000, SLT3000, SLT3010, SLT3020, SLT3030, SLT3040, SLT3050, SLT4050, SLT5000, Quick connect kit FLC10CS Twin 400 mm fly lead to connect 10 mm strip (pack of 10)

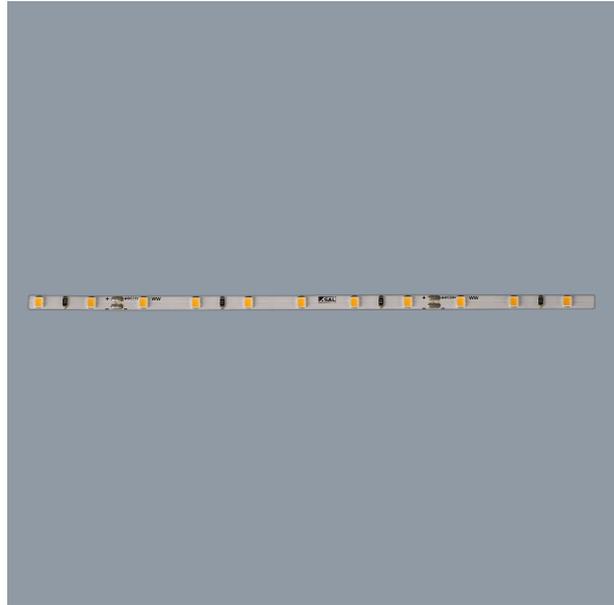

### Performance

Dimmable - **OPTIONAL**

Dimmer Type - **refer dimming options**

### Technical Specification

Model No.	Description	Input Voltage (V/AC)	Beam Angle (°)	Body Colour	CRI	Luminous Flux Per Meter (lm/m)
FL2406WW/SS10	LED STRIP 24V 6W/m IP65 3K	24	115	CLEAR	80	500
FL2406CW/SS10	LED STRIP 24V 6W/m IP65 4K	24	115	CLEAR	80	500
FL2406DL/SS10	LED STRIP 24V 6W/m IP65 6K	24	115	CLEAR	80	500



Model No.	Dimensions (mm)	Colour Temperature (K)
FL2406WW/SS10	20000(L) x 10(W) x 1.6(H)	3000
FL2406CW/SS10	20000(L) x 10(W) x 1.6(H)	4000
FL2406DL/SS10	20000(L) x 10(W) x 1.6(H)	6000

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish.

## Product Images

