



## FLEXI STREAMLINE 24V TC SELECTABLE KITS - 2/5/10M


TC selectable strip kits available in 2, 5 or 10m length , CRI90

### Application





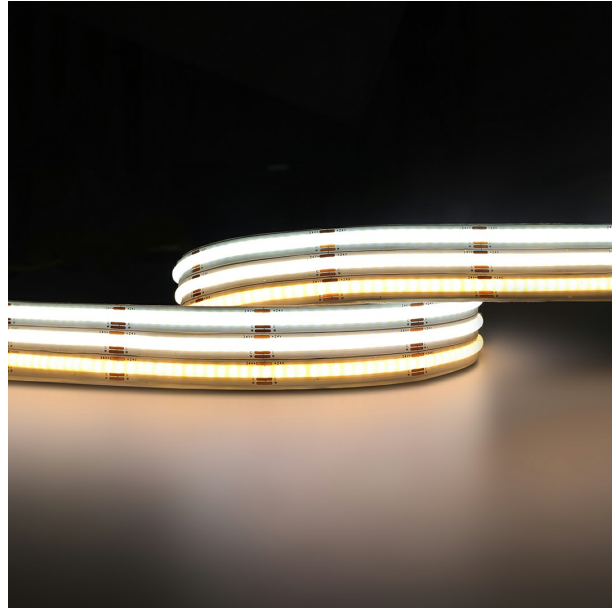


Perfect for the home or commercial, feature lighting application

### Design Specifications

- Choice of 2 metre (15W), 5 metre (35W) or 10 metre (60W) kits
- TC selectable 2700, 4000, 6000K
- Streamline COB LED technology, providing a smooth lighting profile
- Beam distribution 140° , CRI90, 560 LED's per metre
- Remote (IP20) non-dimmable driver included with flex and plug for easy installation
- Cutable (every 50mm), note when cutting LED strips, it is always important to calculate the remaining LED load to reconfirm its compatibility with the existing driver, as driver changes may be required with moderate reduction in loads. [LED channel options refer this section](#)



## Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Beam Angle (°)	CRI	Lumens (lm)
	FLBP24V2M/TC	240	15	140	90	500/560/610
	FLBP24V5M/TC	240	35	140	90	500/560/610
	FLBP24V10M/TC	240	60	140	90	500/560/610
	FLC08TC/KIT	24				
	PLUTO15TC24V	240	15			
	PLUTO40TC24V	240	40			
	PLUTO60TC24V	240	60			

LEDs Per Metre	Cutting Interval	CCT (K)	Body Colour	Dim (mm)
560	50	2700/4000/6000	SILICON	2000(L) x 8(W) x 1.7(H)
560	50	2700/4000/6000	SILICON	5000(L) x 8(W) x 1.7(H)
560	50	2700/4000/6000	SILICON	10000(L) x 8(W) x 1.7(H)
			BLUE	
			BLUE	
			BLUE	

NOTE: Pluto 15/40/60TC drivers are only compatible with SAL FLEXI Streamline FLBP24V/TC strip

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



# Dimensions



UNDERSTAND THE EFFECT OF PRODUCT PERFORMANCE AND SAFETY PLEASE READ THESE INSTALLATION INSTRUCTIONS BEFORE INSTALLING THE PRODUCT.  
 MUST BE INSTALLED BY A LICENSED ELECTRICIAN.  
 SAL products are designed in accordance with all mandatory international and AECQ standards, which require installation in accordance with IEC60950 to qualified installers and strict compliance with the manufacturer's instructions. SAL products are designed to meet the requirements of the applicable standards and will only operate with the following parameters and conditions of use, available on www.sal.net.au.  
 Each individual product will have specific electrical and other safety related information from part of the system and on technical performance and other safety related information in writing to SAL at the time of use.

