



## PANEL S9754 MKII - 18/48W


LED panel with selectable colour

### Application

Designed for commercial and office space lighting tasks.

### Design Specifications

- Extruded aluminium profile with high efficiency opal polystyrene rear diffuser, suitable for a range of installation types.
- Quality white powder coated finish
- High efficiency SMD LED chips, CRI > 80
- Remote constant current non-dimmable LED driver, complete with flex and plug
- Easy selectable colour temperature with an inbuilt DIP switch, 3000, 4000, 5700K for TC models
- Emergency models compliant to AS/NZS2293 with D40 spacing classification available. Warranty for EM models 2 years, battery 1 year.

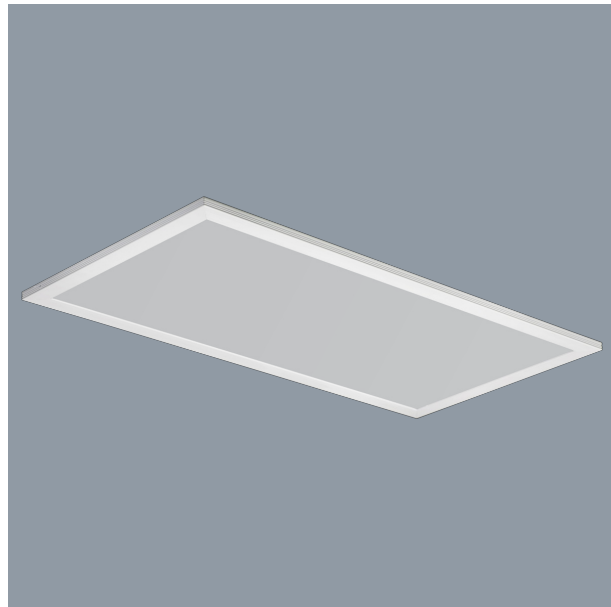

### Performance

Dimmable Driver - **OPTIONAL**

### Technical Specification

Model No.	Description	Input (V)	Power (W)	Lumens (lm)	CCT (K)
<b>S9754/312 CW</b>	LED PANEL 30W 295 X 1195 X 10mm CW WH	240	30	3100	4000
<b>S9754/312 DL</b>	LED PANEL 30W 295 X 1195 X 10mm DL WH	240	30	3200	6000
<b>S9754/306TC</b>	LED PANEL 18W 295 X 595 X 10mm 3/4/6K	240	18	1800/1900/1900	3000/4000/5700
<b>S9754/606TC</b>	LED PANEL 30W 595 X 595 X 10mm 3/4/6K	240	30	3000/3400/3300	3000/4000/5700
<b>S9754/312TC</b>	LED PANEL 30W 295 X 1195 X 10mm 3/4/6K	240	30	2900/3200/3100	3000/4000/5700
<b>S9754/612TC</b>	LED PANEL 48W 595 X 1195 X 11mm 3/4/6K	240	48	5000/5200/5200	3000/4000/5700
<b>S9754/306EM</b>	LED PANEL 18W 300mm X 600 X 10mm EMERG.	240	18		
<b>S9754/606EM</b>	LED PANEL 30W 600 X 600 X 10 mm EMERG.	240	30		
<b>S9754/312EM</b>	LED PANEL 30W 300 X 1200 X 10mm EMERG	240	30		
<b>S9754/612EM</b>	LED PANEL 48W 600 X 1200 X 10mm EMERG	240	48		

INSTALLATION TYPES Standard metric T-Bar ceiling recessed installation Air Slot models to suit -/306, -/312 panel sizes Plaster ceiling recessed installation (S9704 Plaster ceiling frame required) Clean Room models to suit -/606, -/312 panel sizes Surface mounted installation (S306FM, S312FM, S606FM or S612FM surface mounted frame required) Suspended installation (SSI1512 & S9714SP6 or SSI1512 & S9714SP6 Suspension Kits required) Dimming options - Trailing edge (excluding S9754/612) , 1-10V analogue (excluding S9754/612) emergency Compliant to AS/NZS2293 Emergency classification: D40 LED charge status indicator Test switch


Guaranteed 90 minutes emergency operation Intelligent automatic recharging function 16 hours charge time Deep discharge protection SELV compliant Battery type: 1500mAh @ 6.4V

## Photometric Data


### PHOTOMETRIC DATA

Unit: cd C0/C180 — C90/C270 —


S9754/306 @ 4000K



S9754/312 @ 4000K



S9754/606 @ 4000K



S9754/612 @ 4000K

