



PIXIE SMART PIR SENSOR OUTDOOR - SMS862WF/BTAM


PIXIE MASTER DEVICE - SMART HOME PIR Sensor with PE cell and override functions - surface mount IP66

Application

Versatile residential and commercial sensor applications with Smart function control

Design Specifications

- Sensitivity, hold time and brightness threshold adjustment can be set via physical dials, and via the PIXIE PLUS App
- Maximum loads (LED) 500W, (Halogen) 2000W
- Additional PE cell mode
- Detection angle 110° up to 12 metres at a height of 1.8 - 2.5m (Black model detection range 10 metres).
- Simply use the App or PIXIE secondary device to switch among 4 working modes: Motion sensor mode, Override ON, Override OFF, and PE cell mode
- 3 wire design for interior or exterior use in a choice of WHITE or BLACK

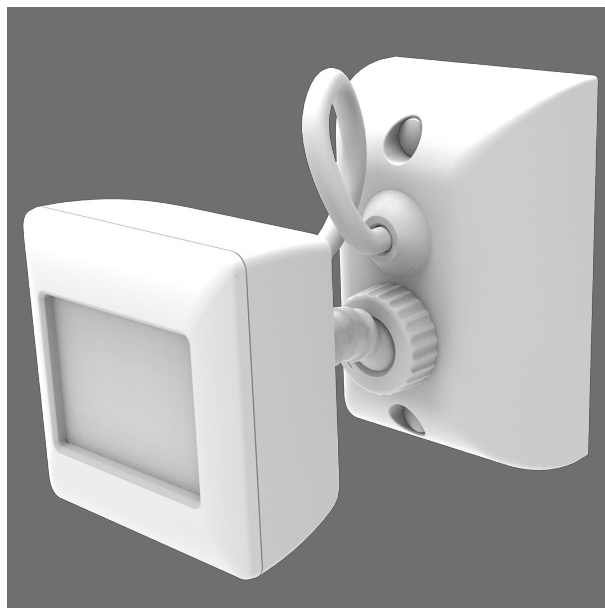



Performance

- Dimmable - **NO**
- In Built Sensor - **YES**
- Sensor Type - **PIR**




Technical Specification

Product	Model No.	Input Voltage (V/AC)	Body Colour
	SMS862WF/WH/BTAM	240	WHITE
	SMS862WF/BK/BTAM	240	BLACK

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

Dimensions



Detection range

