

LED LINEAR & PROFILES



www.sal.net.au

LOW PROFILE LED BATTEN SL9707, SL9709 BLADE TC




DIP Switch




DIMENSIONS

SL9707/60TC

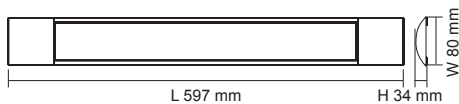


SL9707/120TC

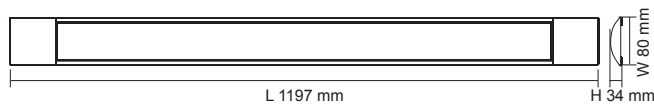

SL9709/60TC



SL9709/120TC

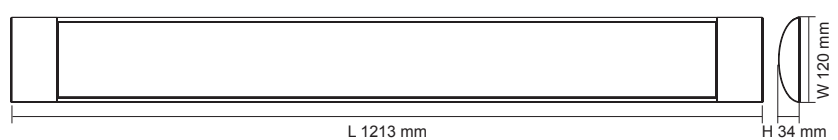

CONSTRUCTION

- Select colour temperature with DIP switch
- Extruded aluminium body with poly end cap
- Powder coated finish
- Cable tray at back of fitting allows easy connections at various cable entry positions
- Opal polycarbonate diffuser
- High efficiency SMD LED chips
- Built-in LED driver

IP RATING

- IP20 suitable for indoor use only

INSTALLATION TYPE

- Surface mounted
- Suspended (Suspension unit required SSI1512, SSY1512)
- End to end installation

Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Fitting Colour
SL9707/60TC	240V	20W	1800lm, 1850lm, 1900lm	3000K, 4000K, 5000K	>80	110°	White
SL9707/120TC	240V	35W	3300lm, 3400lm, 3500lm	3000K, 4000K, 5000K	>80	110°	White

Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Fitting Colour
SL9709/60TC	240V	25W	2200lm, 2600lm, 2400lm	3000K, 4000K, 5000K	>80	110°	White
SL9709/120TC	240V	48W	4400lm, 5000lm, 4800lm	3000K, 4000K, 5000K	>80	110°	White