


LED LINEAR & PROFILES



www.sal.net.au

LED DIFFUSED BATTEN SL9732 ECOLINE

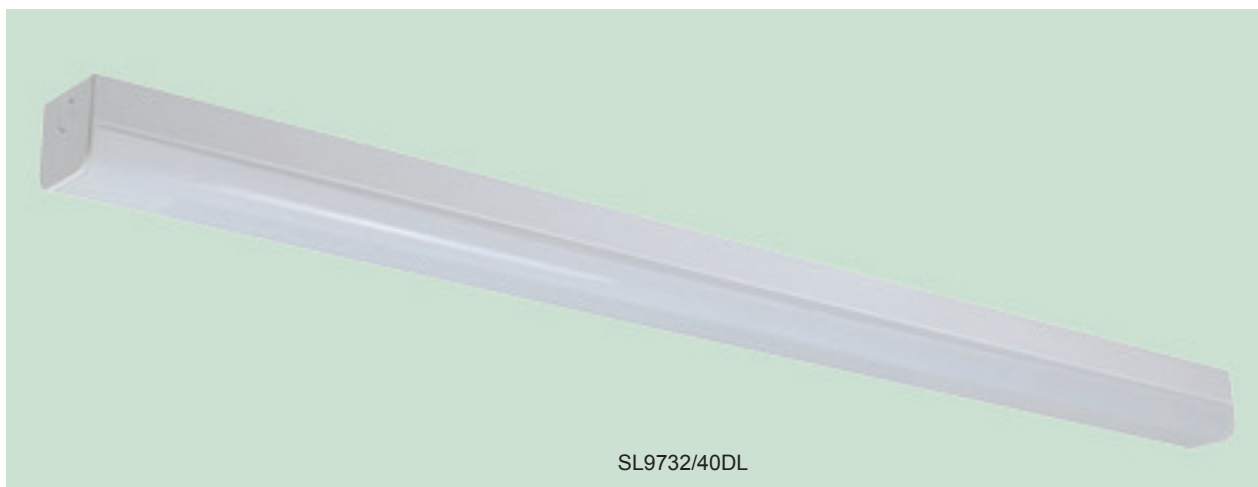

SL9732/40DL



SL9732/20DL

CONSTRUCTION

- 65 mm wide steel body
- Powder coated finish
- Opal polycarbonate diffuser
- High efficiency SMD LED chips
- Constant current LED driver fitted
- Large terminal block installed

APPLICATIONS

- Offices
- Stations
- Garages
- Industrial

IP RATING


- IP20 suitable for indoor use only

DIMMING OPTIONS


- Trailing edge dimming (SL9732/20DL only)
- 1-10V dimming
- Digital dimming (DSI, DALI)

DIMENSIONS

SL9732/20DL

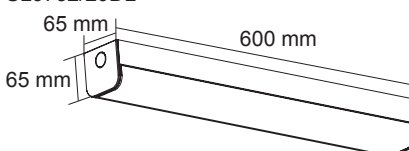

SL9732/40DL

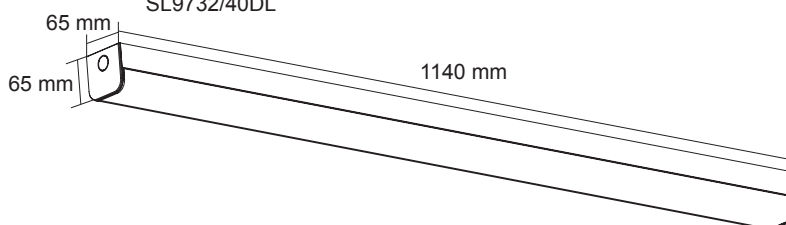

Model No.	Input	Power	Lumen	Beam Angle	CCT	CRI	Dimmable	Fitting Colour
SL9732/20DL	240V	20W	1900lm	120°	5700K	>80	No	White
SL9732/40DL	240V	40W	3800lm	120°	5700K	>80	No	White