

**Head Office**

40 Biloela Street  
Villawood NSW 2163  
T +612 9723 3099  
F +612 9724 1899

**Victoria**

46-48 Keys Road  
Moorabbin VIC 3189  
T +613 9532 3168  
F +613 9532 1838

**Queensland**

13/258 Musgrave Road  
Coopers Plains QLD 4108  
T +617 3276 8897  
F +617 3277 8817

**WA Agencies**

Delta Lighting System  
15 Hunt St. Malaga WA 6090  
T +618 9249 4447  
F +618 9249 2776



# SMS803CD


## SURFACE/RECESSED OCCUPANCY INFRARED SENSOR



### TECHNICAL SPECIFICATIONS

|                    |  |
|--------------------|--|
| Model No.          | SMS803CD   |
| Operating Voltage  | 240V-50Hz  |
| Switched Power     | 2000W Incandescent, 600W Fluorescent, 300W LED   |
| Standby Power      | <1W  |
| Detection Angle    | 360°   |
| Detection Distance | Max. radius 9 m for normal detection at 3 m height,<br>Max. radius 3 m for occupancy detection at 3 m height |
| Duration Time      | 10 seconds to 40 mins adjustable   |
| Lux Threshold      | Adjustable for Dawn to Dusk operation  |
| Sensor Principle   | 3 x Infrared Sensor  |
| Material           | PC   |
| Mounting Method    | Surface Mounted or Recessed  |
| Operating Temp     | -10°C~40°C   |
| IP Rating          | 20   |

### DETECTION RANGE

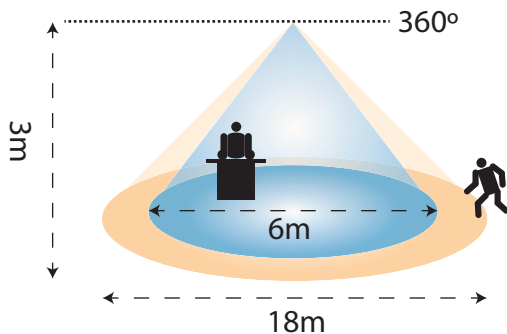

### DIMENSIONS

