

SMART DIMMER

SDD350BT

FEATURES: WHEN USED INDEPENDENTLY

- Push on/off
- Hold to dim up or down
- Memory function
- Settable minimum dim level

FEATURES:

WHEN USED IN CONJUNCTION WITH THE "PIXIE" APP



- **TIMER FUNCTION:** set dimmers or dimmer groups to remain on for set time period
- **SCHEDULE FUNCTION:** set dimmers or dimmer groups to turn off, turn on at set times and days of the week. Required brightness levels can also be selected
- **GROUP FUNCTION:** group dimmers together into dimmer groups
- **SCENE FUNCTION:** set up a range of dimming level scenarios (scenes) by individual dimmers, or dimmer groups

SPECIFICATION


- Fit most branded switch plates. 1, 2 or 3 gang
- Overheating, overload and full short circuit protection
- SMART LED indicator
- Trailing edge phase cutting dimming
- Complies to AS/NZS 60669.2.1
- Retentive terminal screws and loop terminal

TYPICAL WIRELESS RANGE


- 15 m dependant on installation environment



DIMENSIONS

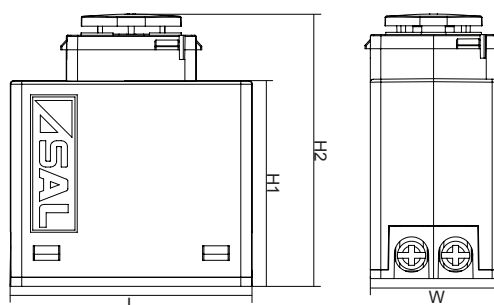

WIRING DIAGRAM

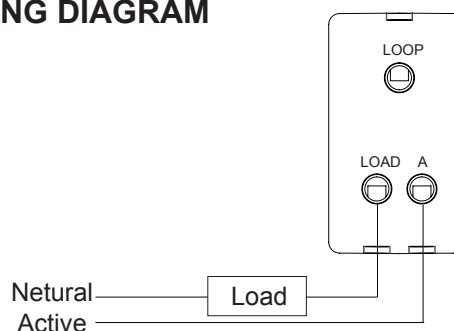

Model No.	Input	Frequency	Max. Load	Min. Load	Dimensions L x H1 x H2 x W	Operating temp.
SDD350BT	220V - 240V	50Hz/60Hz	350W	2W*	40 x 34 x 45 x 22.5 mm	-20~40°C

*Dimming performance will be affected when the load is less than 2W. (At 25°C)



Go to App store (IOS) or Google Play (Android) to download the free PIXIE app to your smart phone.

IOS: Requires IOS 6.0 or later. Compatible with iPhone, iPad and iPad touch

Android: Requires Android 4.4 or above, devices must support Bluetooth 4.0



www.sal.net.au

Specifications above are for reference only and may vary without prior notice