



STARGEM III SES70802TC - 2 X 15W

2 x 15 watt IP54 wall mounted LED floodlight with TC colour select and PIR sensor

Application

A stylish solution for residential exterior spaces, great for security

Design Specifications

- Robust adjustable black aluminium optical head assembly
- Durable polycarbonate mounting base
- Opal polycarbonate diffuser, beam distribution 100 degree, CCT 3000/4000/5700K
- High efficiency SMD LED chips, integral non-dimmable LED driver, 1200/1300/1250lm at selected CCT options
- Integral PIR motion sensor, detection distance 12m at 2.5hm, detection angle 180 degree, manual over-ride function, time and light level adjustments see installation instructions.



Performance

In Built Sensor - **YES**

Sensor Type - **PIR**

Technical Specification


Model No.	Description	Input (V)	Power (W)	Lumens (lm)	CCT (K)	CRI
SES7080/2TC/BK	LED F/LIGHT 2 x 15W IP54 TC SENSOR BK	240	30	1200/1300/1250	3000/4000/5700	80

Model No.	Body Colour	Mass (kg)
SES7080/2TC/BK	BLACK	0.4

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish.

Dimensions

SES7080/2TC

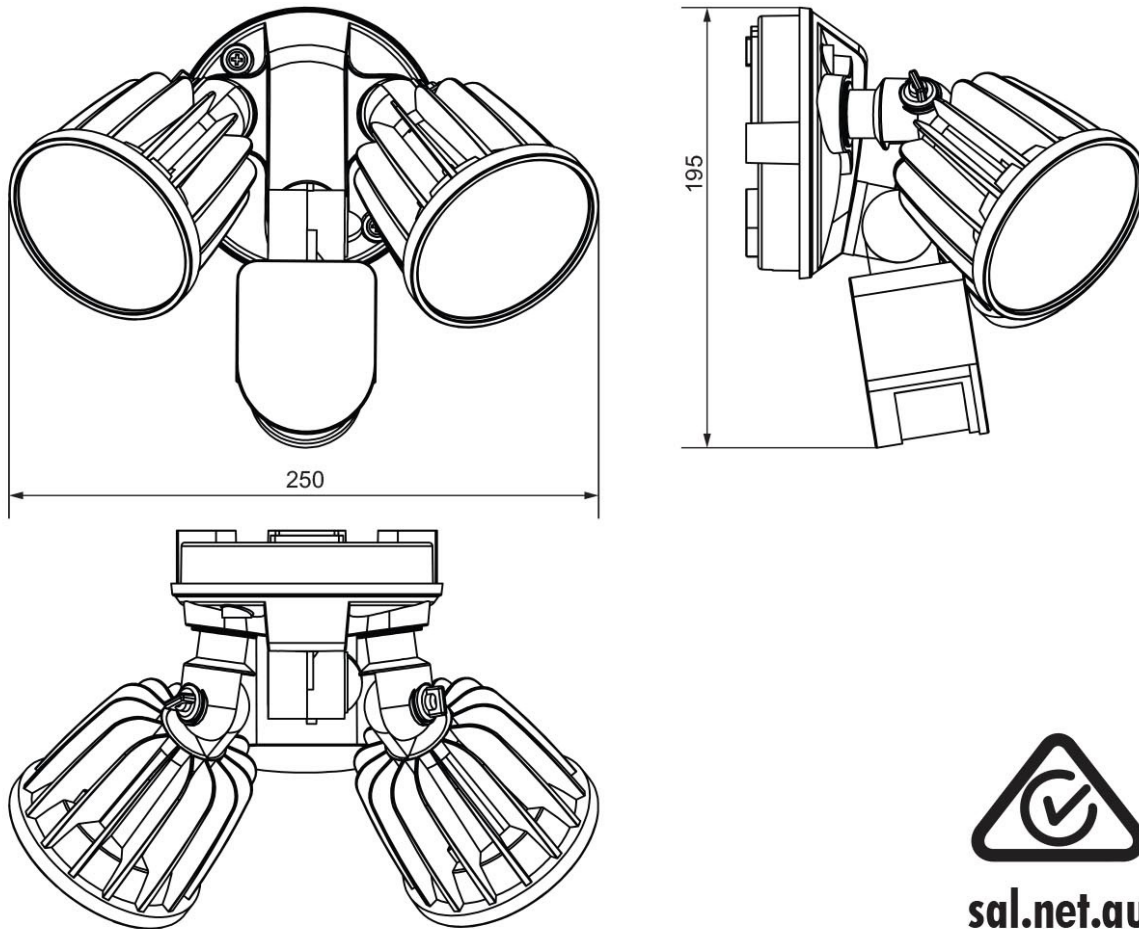

sal.net.au