


SINGLE MODE DUPLEX LSZH FIBRE CABLE

09/125 OS2

PART NUMBER: YYYY-XX-OS2 / YYYY-XX-OS2-2

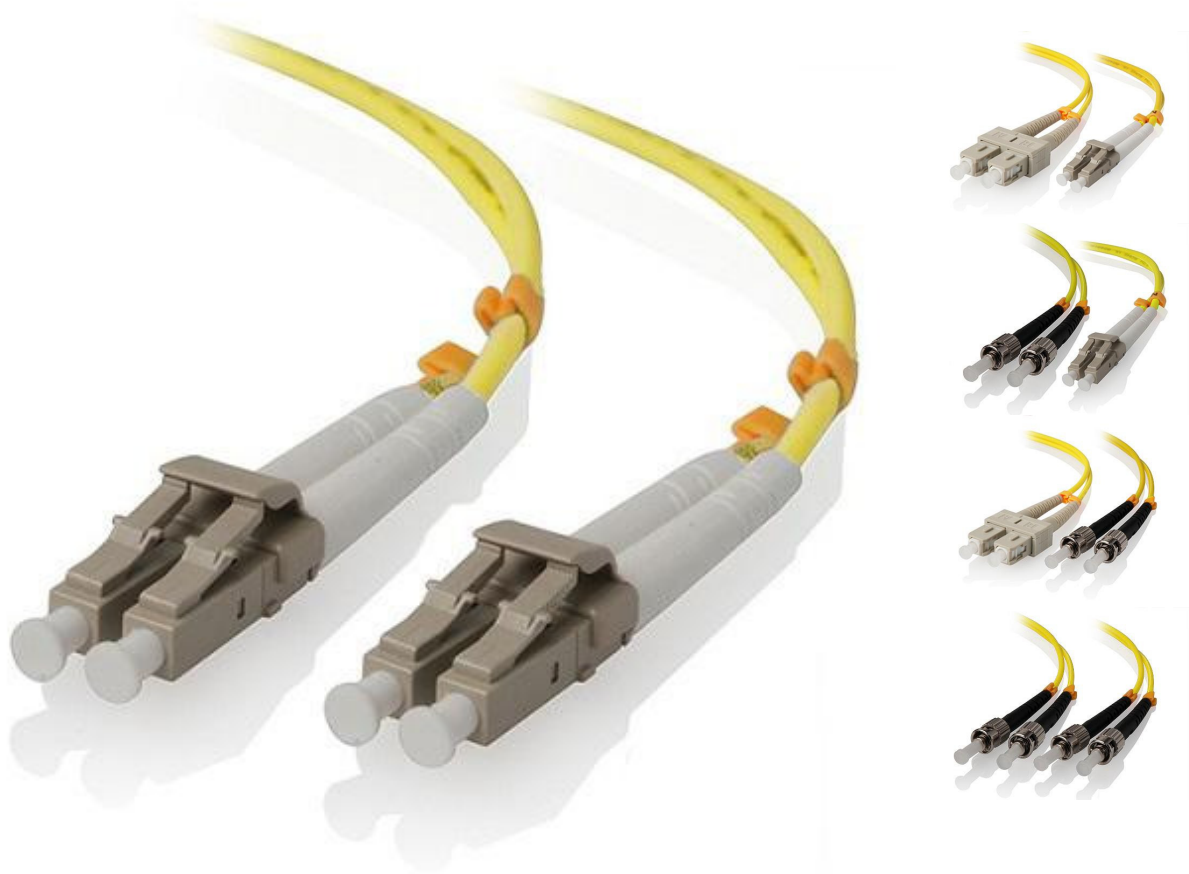

PRODUCT DESCRIPTION

The Single mode OS2 cables are designed to support very high transfer speed and have universal loose tube construction. The SERVEREDGE cables are compliant to fibre type B1.3 in IEC 60793-2-50 & G652.d capable of supporting up to 10gigabit applications over very long distances.

PRODUCT FEATURES

- Single Mode OS2 fibre optic cable.
- Available in various lengths starting from 0.5m to 30m length.
- Compliant to fibre type B1.3 in IEC 60793-2-50 & G652.d.
- Low Smoke Zero Halogen Jacket for minimal toxic emissions in case of fire
- 100% optically tested and provided with test reports.
- 2 Year Warranty.

GUARANTEE/WARRANTY

Serveredge products are manufactured at the highest standards using highest quality materials at an affordable price. This Serveredge product comes with a 2 year warranty standalone or a 25 years warranty as part of a certified structured cabling project. Subject to Serveredge Terms and Conditions*

SPECIFICATIONS

Cable type	OS2
Wavelength	9/125 μm
Insertion Loss	<0.3 dB per 300 m @ 1550 nm or 1300 nm
Fiber	Glass
Number of Fibers	2
Fibre mode	Single Mode OS2
Polish type	UPC to UPC
Fibre glass	G652.d compliant
Jacket	LSZH
Cable Outer Diameter	3.0mm or 2.0mm

PART NO.

Part No.	Packaging
YYYY-XX-OS2	PE Bag
YYYY-XX-OS2-2	PE Bag

*YYYY = CONNECTOR TYPE | XX = LENGTH

YYYY-XX-OS2

AVAILABLE CONNECTORS	AVAILABLE LENGTH
LCLC = LC-LC	0.5 = 0.5m
LCSC = LC-SC	01 = 1m
LCST = LC-ST	1.5 = 1.5m
SCSC = SC-SC	02 = 2m
SCST = SC-ST	03 = 3m
STST = ST-ST	05 = 5m
SCASC = SCA-SC	10 = 10m
SCALC = SCA-LC	15 = 15m
SCASCA = SCA-SCA	20 = 20m
LCALCA = LCA-LCA	30 = 30m
	50 = 50m

YYYY-XX-OS2-2

2mm Variant
