

INDUSTRIAL SIRENS AND SOUNDERS

Bells



MB series


- Solenoid bell available with 4, 6 and 8 inch gongs
- Available in red or grey
- IP55 in 6 and 8 inch sizes when back box is used



*Specify colour R = red, G = grey

Specifications:

Sound Frequency:	2000-12,000Hz
Protection:	IP20 or IP55 in 6 and 8" sizes when installed with back box
Temp Rating (°C):	-25 to +55
Duty cycle:	60min max.
Cable Entry:	side and rear knockouts on back box
Construction:	steel gong, die cast aluminium housing and back box

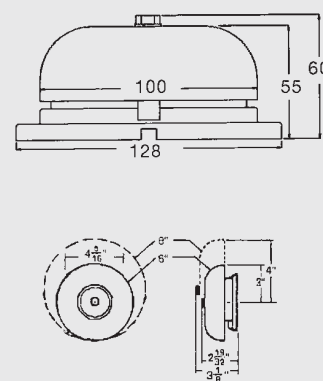


Dimensions in mm

CEAD



- Industrial solenoid bell
- Wide choice of voltages
- Available in red or grey
- Double insulated
- IP66

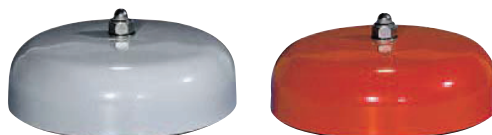


Order Code*	Voltage	Current
CEAD – for AC voltage		
SIR8040125*	12VAC	860mA
SIR8040245*	24VAC	430mA
SIR8040485*	48VAC	250mA
SIR8040605*	60VAC	170mA
SIR8041105*	110VAC	90mA
SIR8042405*	240VAC	50mA
CEADEL – for DC voltage		
SIR8040121*	12VDC	600mA
SIR8040241*	24VDC	300mA
SIR8040481*	48VDC	160mA
SIR8040601*	60VDC	120mA
SIR8041101*	110VDC	60mA
SIR8042401*	240VDC	28mA

*Specify colour R = red, G = grey

Specifications:

Sound output:	98dB @ 1m DC versions 100dB@1m AC versions
Sound frequency:	2000-12000 Hz
Duty cycle:	Continuous
Voltage tolerance:	±10%
Protection:	IP66
Temp rating (°C):	-30 to +50
Cable entry:	M16
Construction:	ABS and steel

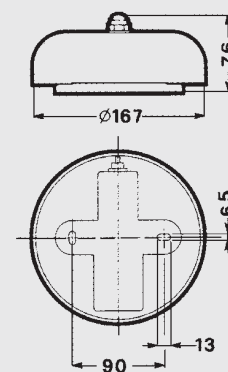

Dimensions in mm