

# Catalogue No: **SSFBS2503P**

## FUSE SWITCH SSF BS 3 POLE 250A EXTERNAL HANDLE KIT

Power Distribution and Protection > Fuse Isolators and Fuse Gear > Fuse Switches > Socomec Fuse Switches (SSF and PSF Series) > SSF Standard Switch Fuses (20 to 1250A) > BS Fuse Types



Representative Photo Only  
(actual product may vary based on configuration selections)

### FUSE SWITCH SSF BS 3 POLE 250A EXTERNAL HANDLE KIT

- Switch Fuses are available in sizes ranging 20A to 1250A, in 3 or 4 poles, offering safe and reliable overcurrent protection
- Installable fuse link types are DIN, BS or semiconductor types to 690VAC for LV power distribution and motor control applications
- Fuse switches types: SSF Standard Fuse Switches or PFS Plug-in Fuse Switches suit a wide range of uses
- Accessories direct mount and extension handles, terminal covers, auxiliaries, and fuse monitors which allow application customisation
- Socomec SSF switch fuses are stocked for quick delivery

#### SPECIFICATIONS

Component Type Fuse-gear	Fuse Switches
Fuse Cartridge Size	B1-B2-B3 size
Fuse Current Rating	250 A
Ue, Rated Operational Voltage, AC, min	400 V AC
Ue, Rated Operational Voltage, AC, max	690 V AC
Ue, Rated Operational Voltage, DC, min	220 V DC
Ue, Rated Operational Voltage, DC, max	440 V DC
Ie, Rated Operational Current, AC 21a, 400V AC	250 A
Ie, Rated Operational Current, AC 21a, 415V AC	250 A
Ie, Rated Operational Current, AC-21a, 690V	250 A @690V
Ie, Rated Operational Current, AC 22a, 400V AC	250 A
Ie, Rated Operational Current, AC 22a, 690V AC	250 A
Ie, Rated Operational Current, AC 23a, 400V AC	250 A
Ie, Rated Operational Current, AC 23a, 415V AC	250 A
Ie, Rated Operational Current, AC 23a, 690V AC	250 A
Ie, Rated Operational Current, DC 21a, 220V DC	250 A
Ie, Rated Operational Current, DC 21a, 440V DC	250 A
Ie, Rated Operational Current, DC 22a, 220V DC	250 A
Ie, Rated Operational Current, DC 22a, 440V DC	250 A
Ie, Rated Operational Current, DC 23a, 220V DC	200 A
Ie, Rated Operational Current, DC 23a, 440V DC	200 A
Current, Fuse-Protected Short-Circuit Capacity, 400V	32.5 kA
Icw, short time withstand current, 1s (rms)	80 kA for 1s
kW Rating, AC-23a, 400V, 3ph	132 kW
kW Rating, AC-23a, 690V, 3ph	220 kW
Poles	3P
Uimp, Impulse Withstand Voltage	8 kV

# Catalogue No: SSFBS2503P

## FUSE SWITCH SSF BS 3 POLE 250A EXTERNAL HANDLE KIT


Power Distribution and Protection > Fuse Isolators and Fuse Gear > Fuse Switches > Socomec Fuse Switches (SSF and PSF Series) > SSF Standard Switch Fuses (20 to 1250A) > BS Fuse Types



Ui, Rated Insulation Voltage	750 V (rms)
Wire / Conductor Size, Flex Cable, Min	95 mm <sup>2</sup>
Wire / Conductor Size, Flex Cable, Max	240 mm <sup>2</sup>
Mechanical service life	10000 cycles
Height	146 mm
Width	234 mm
Depth	195 mm
Weight	3.8 kg
Standards Compliance	IEC 60947-3 AS/NZS 60947-3

### REFERENCES

IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

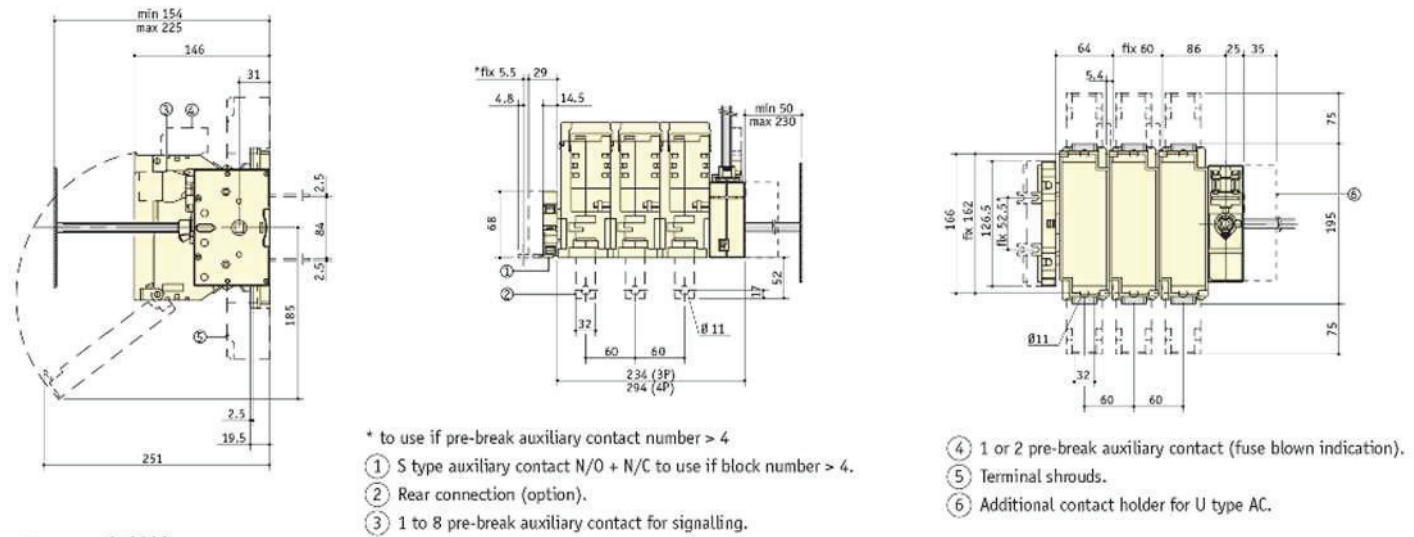

Dimension Diagram

Catalogue No: **SSFBS2503P**

**FUSE SWITCH SSF BS 3 POLE 250A EXTERNAL HANDLE KIT**

Power Distribution and Protection > Fuse Isolators and Fuse Gear > Fuse Switches > Socomec Fuse Switches (SSF and PSF Series) > SSF Standard Switch Fuses (20 to 1250A) > BS Fuse Types

