
Smart Energy Hot Water For Australia

SMRT-HOT-WTR-48-S1



SMART ENERGY

Maximises self-consumption by storing excess solar energy as hot water

- / Seamless integration with all SolarEdge inverters, and the monitoring platform
- / Adjusts power supplied to the heater based on available PV power (up to 4.8 kW)
- / Built-in water tank power-consumption meter
- / Simple wall mount installation with an IP65 protection rating
- / Wireless communication with the inverter
- / Suitable for powering purely resistive loads only
- / Optional temperature sensor for optimised heating

Smart Energy Hot Water For Australia

SMRT-HOT-WTR-48-S1

SMRT-HOT-WTR-48-S1		UNIT
ELECTRICAL SERVICE		
Operating Voltage Range	207-264	Vac
AC Frequency	50	Hz
Nominal Voltage	230	Vac
Supported Grids	L / N / PE	
Maximum Supported Load Size	4.8	kW
Maximum Load Current Rating	21	A
Input Over voltage protection ⁽¹⁾	264	Vac
Minimum Output Power	5% of load rating	
Load Type	Resistive	
Efficiency	> 98	%
Output Over-current Protection	22	A
External Over-current Protective Device Rating	≥ 25	A
Type of Action	Type 1 C	
Over Voltage Category ⁽²⁾	III	
COMMUNICATION		
Supported Communication Protocol	ZigBee Home Automation	
Device Configuration	Via SetApp, the inverter LCD or the monitoring platform / app	
Nominal Transmit Power	11.8	dBm
Operating Frequency Range	2.4 - 2.5	GHz
Bandwidth	2	MHz
Modulation	O-QPSK with DSSS coding	
Outdoor (LOS) Range	400 / 1312	m / ft
Indoor Range ⁽³⁾	50 / 164	m / ft
EIRP with Antenna	16.8	dBm
Maximum Emitted Power	≤ 20	dBm
STANDARD COMPLIANCE		
Radio	ETSI EN 300 328 V 1.8.1, ETSI EN 301 489-1, ETSI EN 301 489-17	
Safety	IEC-60730 -1	
EMC	EN61000-6-1 2 3, EN61000-4-2 3 4 5 6 8 11	
INSTALLATION SPECIFICATIONS		
Dimensions (H x W x D)	375 x 240 x 110 / 14.7 x 9.5 x 4.5	mm / inch
Weight	5.3 / 11.7	kg / lb
Operating Temperature Range	-10 to +50 / 14 to 122	°C / °F
Maximum distance between Device and Load/Cable cross section	3/10 for 13 AWG/2.5 mm ² 20/65 for 11 AWG/4 mm ²	m / ft
Terminal Block Minimum Wire Cross Section	1.5 / 15	mm ² / AWG
Interfaces	1. AC in 2. AC out 3. External antenna, RP-SMA	
Conduits	Pre-drilled openings of 25 mm for 2 conduits	
Mounting Type	Wall mount	
Pollution Degree	3	
IP Rating	IP65	
SENSOR SPECIFICATIONS⁽⁴⁾		
Sensor type	Pt100 (100 Ohms @ 0°C) to IEC 751, Class B, 3/4 wire	
Construction	6.0mm diameter stem in 316 stainless steel	
Termination	IP67 aluminium alloy weatherproof connection head with 4 wire connection block, M20 x 1.5mm cable entry (gland included)	
Process connection	1/2" BSP parallel	
Probe temperature range	-100°C to +450°C (connection head @ 170°C)	
Probe Diameter	Ø6mm (1/4")	
Probe length	150mm 1/2" BSPP	


⁽¹⁾ The device stops diverting power to the load when this threshold is exceeded

⁽²⁾ Working voltage of 300 Vac

⁽³⁾ Approximate values. May differ depending on specific installation conditions

⁽⁴⁾ Temperature sensor ordered separately. For more information please contact SolarEdge

/ SolarEdge System with Smart Energy Hot Water For Australia

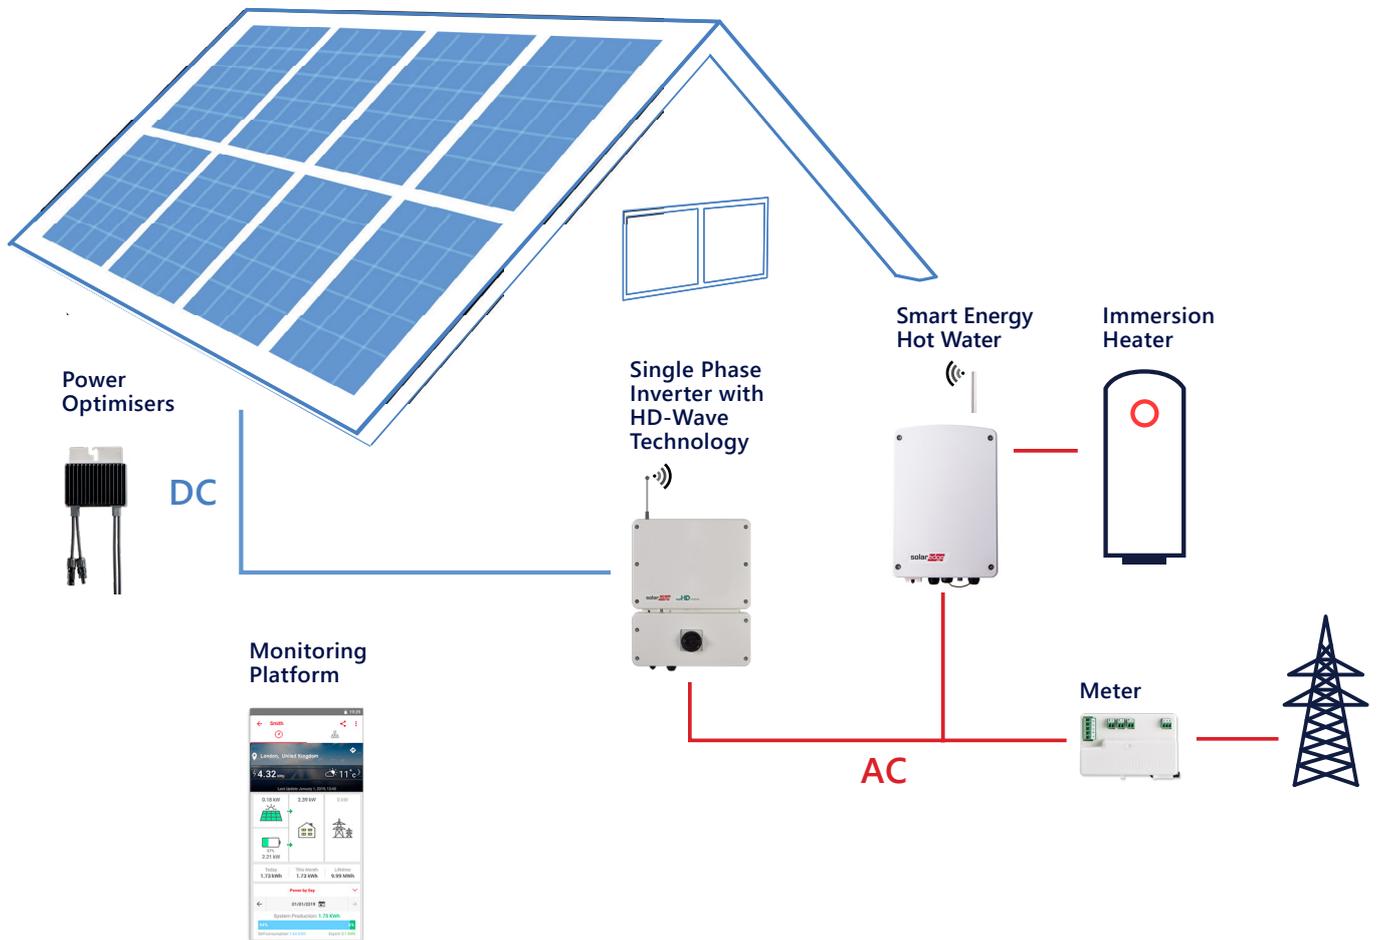

Temperature Sensor⁽⁴⁾



CE

© SolarEdge Technologies, Inc. All rights reserved. SOLAREEDGE, the SolarEdge logo, OPTIMIZED BY SOLAREEDGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks mentioned herein are trademarks of their respective owners. Date: 09/2019/V01/DS AUS. Subject to change without notice.

solaredge