


Accessories

Solis Data Logging Stick

Ginlong Monitoring System



Data Logging Stick

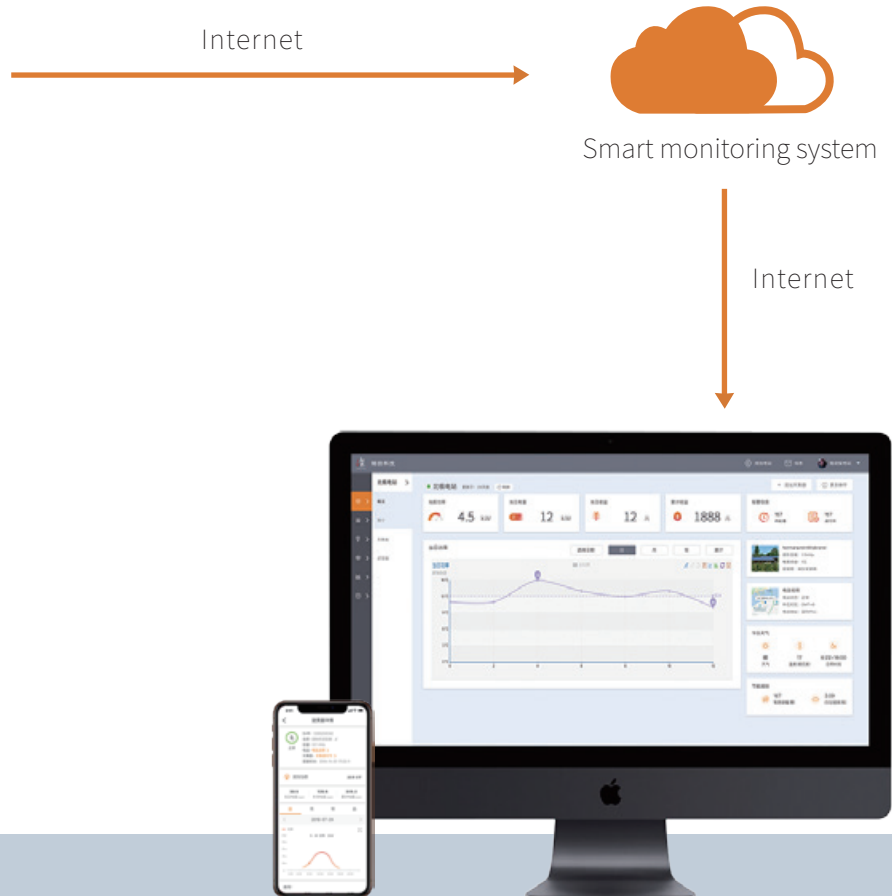

Data Logging Stick
GPRS

Data Logging Stick: GPRS

- Quick installation and easy operation
- Connecting inverters with 'plug and play' function
- Easy visualization of data and other information via mobile device
- GPRS communication enabling mobile monitoring anytime anywhere

Datasheet

Model	DLS-G(GPRS)
Max.number of inverters	1
Inverter communication	4pin
Remote communication	GPRS Class 12
Communication rate	9600 bps(adjustable:1200-57600 bps)
Frequency	850/900/1800/1900 MHz
GPRS multi-slot	/
WiFi communication range	/
LAN communication range	/
WiFi transmitting power	/
WiFi receiving sensitivity	/
GPRS Mobile Station	ClassC
Compatible with the GSM Phase 2/2 +	Class 4 (2W@850/900MHz) Class 1 (1W@1800/1900MHz)
External antenna	I-PEX antenna
Data collection intervals	5 minutes (adjustable:1-20 minutes)
Data interface	RS485
Preferences setting	Web Server
Firmware updates	Wireless
Data access	Remote server
Data storage	8MBYTE FLASH
Electrical	
Input voltage	DC 5V (+/-5%)
Working current	160mA~500mA
Static power consumption	<2W
Max. instantaneous power consumption	<8W
Environmental	
Operating temperature	-10 ~ +85°C
Operating humidity	10%-90% Relative humidity, no condensa
Storage temperature	-40 ~ +125°C
Storage humidity	<40%
Protection class	IP65
Physical	
Dimension(mm)	118L*43W*43H
Weight(g)	56
Other	
Warranty	2 years
Certificates	FCC, CE