


Catalogue No: **CAS7-12-14C-240VAC**

**SAFETY CONTACTOR 3P 5.5kW 1N/O 4N/C AUXILIARY 240V AC COIL**

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher+Schuh Contactors > CAS7 Safety Contactors > 3-Pole Safety Contactors with AC Coil

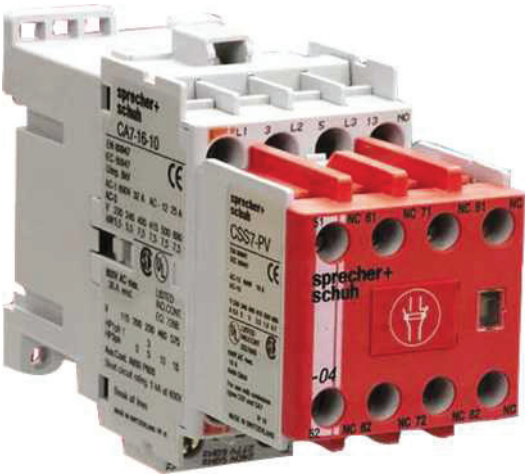

Safety contactor 3 pole 12A 5.5kW 1N/O 4N/C auxiliary 240V AC Coil

- Four different contactor families provide a wide variety of contactor sizes, offering economy and selection
- Compact dimensions saves panel space

Representative Photo Only  
(actual product may vary based on configuration selections)

SPECIFICATIONS	
Component Type Motor Control and Drives	Safety Contactor
Contactor Group	Contactors up to 7.5 kW
Ie, Rated Operational Current, AC-1, 415V, 40°C	32 A @415V, 40°C
kW Rating, AC-3, 415V, 60°C	5.5 kW @415V, 60°C
Ie, Rated Operational Current, AC-3, 415V, 60°C	12 A @415V, 60°C
Main Poles	3 N/O
Coil Type	Conventional
Coil Voltage	240 V AC V
Integrated Aux	1 N/O + 4 N/C
Product Notes	Cross Stamped Auxiliary Contacts
IP Rating	IP20

REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-


Catalogue No: **CAS7-12-14C-240VAC**

SAFETY CONTACTOR 3P 5.5kW 1N/O 4N/C AUXILIARY 240V AC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher+Schuh Contactors > CAS7 Safety Contactors > 3-Pole Safety Contactors with AC Coil



Dimensions are in millimeters. Dimensions are not intended for manufacturing purposes.

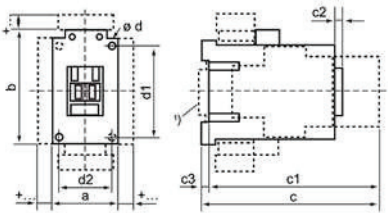

Type	a	b	c	c1	c2	c3	ød	d1	d2
CAS 7 - 9...CAS 7 - 23	45	81	119.5	114.5	6	4.5	2 x 4.5	60	35 <sup>1)</sup>
CAS 7 - 30...CAS 7 - 37	45	81	136.5	131.6	6.5	4.5	2 x 4.5	60	35 <sup>1)</sup>
CAS 7 - 43	54	81	139.5	134.6	6.5	5	2 x 4.5	60	45 <sup>1)</sup>
CAS 7 - 60...CAS 7 - 85	72	122	156	150.5	8.5	5.5	4 x 5.4	100	55 <sup>1)</sup>

Accessories			
Contactor with ...			mm
Auxiliary contact block, side-mounted	1 or 2 pole		a + 9
Solid-state timing module (100-ETA)	on coil connection side		b + 24
Solid-state timing module (100-ETB / 100-ETY)	on coil connection side		b + 24
Mechanical interlock	side-mounted		a + 9
Interface	on coil connection side		b + 9
Suppressor module	on coil connection side		b + 3
Marking with:	sheets of labels		+ 0
	marking sheets with cover		+ 0
	label holder for V4/V5		+ 5.5
	label holder for V7		+ 5.5

Dimension Diagram

Connection / Wiring Diagram

Technical Diagram