

Catalogue No: **EREV4-5RD-240VAC**

STARTER COMPACT ROLLER DOOR 2.2kW 240V AC CONTROL

Motor Control and Drives > Motor Starting and Protection > Assembled Motor Starters > Sprecher + Schuh Motor Starters > Reversing Motor Starters > EREV4 Streamline Reversing Motor Starters 2.2 to 4kW



Representative Photo Only
(actual product may vary based on configuration selections)

Reversing Starter 2.2KW, IP66 Polycarbonate Enclosure, Roller Door Type, Control Voltage 240V AC, Forward, Reverse And Stop/Reset Pushbuttons, No Overload

- Wide range of NHP motor starting method versions available, allowing for correct selection of a motor starter to suit the application load condition requirements during starting
- Available in a number of IP ratings and enclosure type, to allow selection to meet the different installation environments

SPECIFICATIONS

kW Rating, AC-3, 415V	2.2 kW @415V
Component Type Motor Control and Drives	Reversing Starter
IP Rating	IP66
Motor Connection	3 wire
Enclosure Type	Insulated polycarbonate enclosed (IP 66)
Control Voltage, AC, Nom	240 V AC
Button Arrangement	Forward / Reverse / Stop Reset


REFERENCES

IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Catalogue No: **EREV4-5RD-240VAC**

STARTER COMPACT ROLLER DOOR 2.2kW 240V AC CONTROL

Motor Control and Drives > Motor Starting and Protection > Assembled Motor Starters > Sprecher + Schuh Motor Starters > Reversing Motor Starters > EREV4 Streamline Reversing Motor Starters 2.2 to 4kW

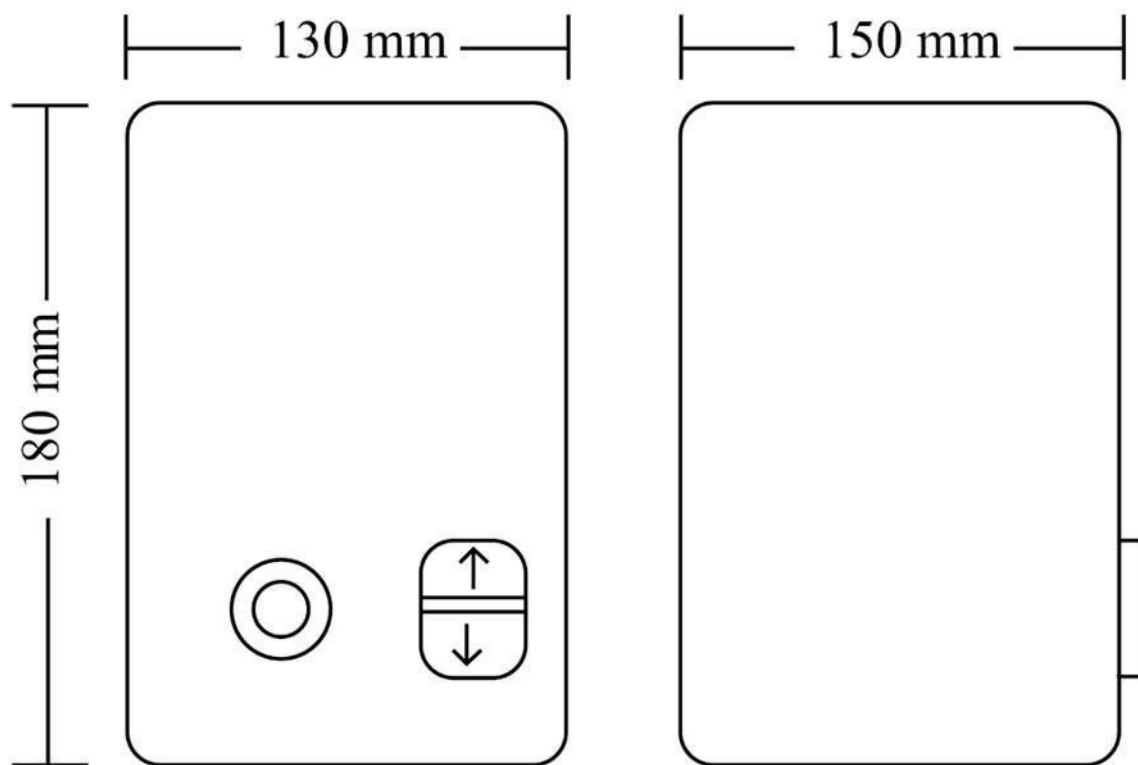

Dimension Diagram

Technical Diagram