



Representative Photo Only
(actual product may vary based on configuration selections)

Load break switch 3P panel mount 32A

- Rated currents up to 100A
- Touch-proof switch body (IP 20)
- Water spray and dustproof mechanism handles (IP 66)
- Easily accessible terminals
- Clearly marked terminals
- Wide range of accessories
- High AC 23 A ratings
- High breaking capacity
- Electronic compatibility of auxiliary contacts
- High short circuit withstand capacity (reduced risk of welding)
- High overvoltage withstand

SPECIFICATIONS

Number of Poles	3
Icw, short time withstand current, 1s (rms)	0.9 kA for 1s
Ui, Rated Insulation Voltage	690 V (rms)
Uimp, Impulse Withstand Voltage	690 kV
Ie, Rated Operational Current, AC-21a, 690V	32 A @690V
Ie, Rated Operational Current, DC 21a, 110V DC	32 A
Ie, Rated Operational Current, DC 21a, 220V DC	15 A
Ie, Rated Operational Current, DC 21a, 440V DC	2.2 A
kW Rating, AC-23a, 400V, 3ph	15 kW
kW Rating, AC-23a, 690V, 3ph	15 kW
Tightening Torque, Max	12 Nm
Operating Temperature, min	-25 °C min
Operating Temperature, Max	60 °C max
Storage Temperature, min	-40 °C min
Storage Temperature, max	80 °C max
Standards Compliance	IEC 60947-1 IEC 60947-3

REFERENCES

IECEX Certificate -

Supplier Declaration of
Conformity: -


Installation Guide: -

User Manual: -

Manufacturer Datasheet: -

Manufacturer Catalogue
& Product Selection: -

LE 7 - panel mounted switches - 3 pole (16 ... 100 A)

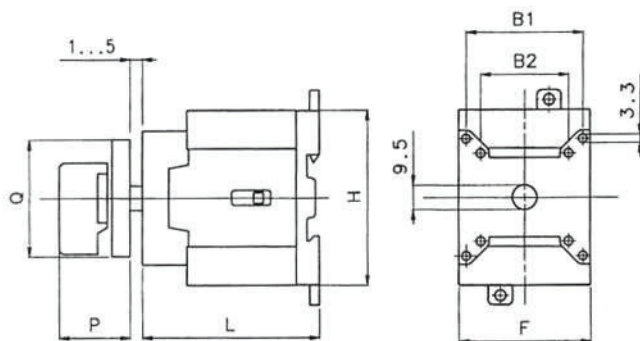

Type	B1	B2	F	H	L
LE 7-16	-	-	36	63	51
LE 7-25/32	-	36	45	64	60
LE 7-40/63	48	36	54	72	74
LE 7-80/100	48	36	72	90	90

Control handles

Cat. No.	Q	P	B
LFS 2-A-4	48 x 48	28	36
LFS 2-E-4	48 x 48	28	48
LFS 2-A-6	64 x 64	28	48
LFS 2-E-6	64 x 64	28	48
LFS 7-N-4-175	54 X 54	28	28
LFS 2-N-6	67 x 67	34	48
LFS 2-G-6	67 x 67	34	48
LFS 7-G-4-175	54 X 54	28	28

Dimension Diagram

Technical Diagram