Stanilite EXCEL LED

Technical Data Sheet

Product Line: Stanilite®

Product Group: Excel LED Exit Range

Additional Description: LED Quickfit Theatre Mast Exit

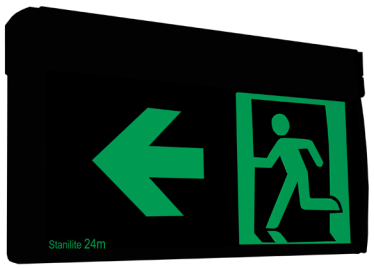

Image indicative only

Catalogue No.	Description
PQFBLED-1	LED Quickfit Theatre Mask Single Sided Picto Exit
PQFBLED-2	LED Quickfit Theatre Mask Single Sided <Picto Exit
PQFBLED-3	LED Quickfit Theatre Mask Single Sided Picto> Exit
PQFBLED-5	LED Quickfit Theatre Mask Double Sided Picto Exit
PQFBLED-6	LED Quickfit Theatre Mask Double Sided AOW Picto Exit
PQFBNXSLED-1	LED Quickfit Nexus LX Theatre Mask Single Sided Picto Exit
PQFBNXSLED-2	LED Quickfit Nexus LX Theatre Mask Single Sided <Picto Exit
PQFBNXSLED-3	LED Quickfit Nexus LX Theatre Mask Single Sided Picto> Exit
PQFBNXSLED-5	LED Quickfit Nexus LX Theatre Mask Double Sided Picto Exit
PQFBNXSLED-6	LED Quickfit Nexus LX Theatre Mask Double Sided AOW Picto Exit
PQFBNRFLED-1	LED Quickfit Nexus RF Theatre Mask Single Sided Picto Exit
PQFBNRFLED-2	LED Quickfit Nexus RF Theatre Mask Single Sided <Picto Exit
PQFBNRFLED-3	LED Quickfit Nexus RF Theatre Mask Single Sided Picto> Exit
PQFBNRFLED-5	LED Quickfit Nexus RF Theatre Mask Double Sided Picto Exit
PQFBNRFLED-6	LED Quickfit Nexus RF Theatre Mask Double Sided AOW Picto Exit

Features:

- Architecturally pleasing slim line design
- Unique steel Quickfit® mounting bracket that provides strength and enables quick and easy maintenance
- PerpetuLED® LED technology 100,000 hours plus lamp life
- Advanced PulseTIME® dual rate battery charger with high temperature NiCad batteries
- Universal wall/ceiling mounting, can also be rod or wire suspended
- Option - Standard, Nexus® LX monitored or Nexus RF monitored
- Retrofit capability; fits into any existing Quickfit mounting bracket

Dimensions:

Length	Width	Height (Including Bracket)
379mm	72mm	214mm

Weight:

Model	Weight
All Models	1.8kg

Construction:

Part	Construction
Body & Diffuser	Polycarbonate
Bracket	Black Powder Coated Zinc Steel

Light Source:

Model	Light Source
All Models	Multiple LED 1.6W

Power Consumption:

Model	Power Consumption
Standard	3.6W
Nexus LX	3.9W
Nexus RF	3.9W

Spare Parts:

Catalogue No.	Description
03-01218	Battery 4 Cell Sub-C NiCad Straight 4.8V 1.8Ah

Thomas & Betts emergency lighting products are designed to comply with AS2293 and meet relevant Australian EMC Standards.
Due to ongoing product development, specification changes may result.

Thomas & Betts (Australasia) Pty. Ltd.
Phone: 1300 666 595 | Fax: 1300 666 594
Email: austsales@tnb.com | Website: www.tnbaust.com
ABN: 62 074 810 898

26 November 2014

Thomas&Betts
A Member of the ABB Group