



Slimlite

SLIMLITE


Features

SlimLite presents a miniaturised lighting system with utmost versatility making it ideal for the most demanding of spaces. Available in five different lengths, SlimLite's integrated electronic control gear for flicker free and soft start up can utilise either fluorescent T5 FHE or FHO lamps. Choose between FHE and FHO dependant on the overall intensity of light required.

- “ Slimlite's notably simple profile
- “ Versatility with numerous power feed options
- “ Built in electronic ballast
- “ Linkable up to 400w from one power supply
- “ Cool in operation- ideal for heat sensitive products
- “ Rigid aluminium housing providing superior strength and thermal safety
- “ Polycarbonate diffuser
- “ Low energy consumption
- “ Soft start – flicker free
- “ Ballast protection with fail safe mode and fault detection

Approvals


- “ UL Listed
- “ CE and TUV approval
- “ EMC compliance to IEC 60069
- “ AS/NZS CISPR 15
- “ IEC/EN 60598

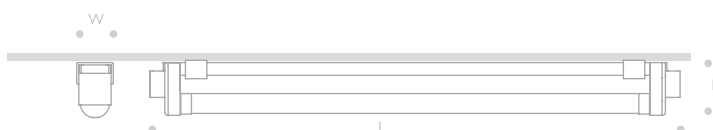

“ APPLICATIONS RETAIL / OFFICES / HOTEL & LEISURE / EDUCATIONAL / PUBLIC BUILDINGS / RESIDENTIAL / HEALTHCARE / GALLERY



MOUNTING OPTIONS

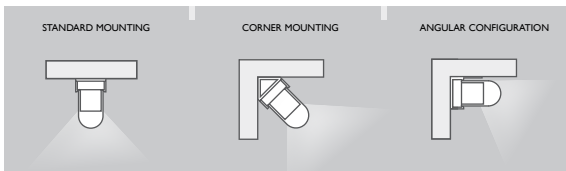

SLIMLITE DIMENSIONS

Wattage		Length	Width		Height	
FHE	FHO		FHE	FHO	FHE	FHO
8w Non Diffused		335	23		33	
8w Diffused		335	23		35	
14w Non Diffused	24w Non Diffused	595	23	25	33	38
14w Diffused	24w Diffused	595	23	27	35	40
21w Non Diffused	39w Non Diffused	895	23	25	33	38
21w Diffused	39w Diffused	895	23	27	35	40
28w Non Diffused	54w Non Diffused	1195	23	25	33	38
28w Diffused	54w Diffused	1195	23	27	35	40
35w Non Diffused		1495	23		33	
35w Diffused		1495	23		35	

** Full product specifications & accessory compatibility is listed on pages 278-279

** FHO Slimline uses a 3 pin connector

Slimlite FHE



ORDER CODE

ACCESSORIES

Housing C/W Lamp	Dimensions Length x Width x Height	Replacment Lamp Code (FHE)	Colour Temp																											
				Power Cord				Buswire				Diffuser				Mounting Bracket				Rigid Direct Connector				End Cap						
				SLT5-PC	SLT5-PC1800FP	SLT5-PC2000FPS	SLT5-PC1800	SLT5-PC2000NP	SLT5-PC5000NP	SLT5-PC5000FP	SLT5-BW0150	SLT5-BW0300	SLT5-BW0600	SLT5-BW01200	SLT5-BW01800	SLT5-08W/DIF	SLT5-14W/DIF	SLT5-21W/DIF	SLT5-28W/DIF	SLT5-35W/DIF	Mounting Bracket	SLT5-BKT45	SLT5-BKT90	SLT5-BKTSTD	SLT5-BKTMET	SLT5-DC	SLT5-OC	SLT5-DEC		
SLT5-08W3K	345 X 23 X 33	208830	3000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•				•	•	•	•	•	•	•	•	•	
SLT5-08W3KD	345 X 23 X 35	208830	3000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•				•	•	•	•	•	•	•	•	•
SLT5-08W4K	345 X 23 X 33	208840	4000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•				•	•	•	•	•	•	•	•	•
SLT5-08W4KD	345 X 23 X 35	208840	4000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•				•	•	•	•	•	•	•	•
SLT5-14W3K	595 X 23 X 33	200760	3000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•
SLT5-14W3KD	595 X 23 X 35	200760	3000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•
SLT5-14W4K	595 X 23 X 33	200761	4000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•
SLT5-14W4KD	595 X 23 X 35	200761	4000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•
SLT5-14W6K	595 X 23 X 33	200762	6500K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•
SLT5-14W6KD	595 X 23 X 35	200762	6500K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•
SLT5-21W3K	895 X 23 X 33	200763	3000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•
SLT5-21W3KD	895 X 23 X 35	200763	3000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•
SLT5-21W4K	895 X 23 X 33	200764	4000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•
SLT5-21W4KD	895 X 23 X 35	200764	4000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•
SLT5-21W6K	895 X 23 X 33	200765	6500K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•
SLT5-21W6KD	895 X 23 X 35	200765	6500K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•
SLT5-28W3K	1195 X 23 X 33	200766	3000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•
SLT5-28W3KD	1195 X 23 X 35	200766	3000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•
SLT5-28W4K	1195 X 23 X 33	200767	4000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•
SLT5-28W4KD	1195 X 23 X 35	200767	4000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•
SLT5-28W6K	1195 X 23 X 33	200768	6500K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•
SLT5-28W6KD	1195 X 23 X 35	200768	6500K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•
SLT5-35W3K	1495 X 23 X 33	200769	3000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•
SLT5-35W3KD	1495 X 23 X 35	200769	3000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•
SLT5-35W4K	1495 X 23 X 33	200770	4000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•
SLT5-35W4KD	1495 X 23 X 35	200770	4000K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•
SLT5-35W6K	1495 X 23 X 33	200778	6500K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•
SLT5-35W6KD	1495 X 23 X 35	200778	6500K	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•

- › Slimlite IP 20 Rating
- › Slimlite Non Dimmable
- › Max Connection 400w per power cord

Order Code Definition

