

Catalogue No: **T2CF253SLNG**

T2 TERMINAL COVER FC FOR E/S160-250 3P

Power Distribution and Protection > Circuit Breakers > Moulded Case Circuit Breakers > Terasaki TemBreak 2 Moulded Case Circuit Breakers > TemBreak 2 External Accessories 125 AF to 1600 AF > Terminal Covers and Barriers



Representative Photo Only
(actual product may vary based on configuration selections)

T2 TERM COVER FC 3P E/S160250

- Wide range of fault interruption ratings from 25 to 200kA to cater for a wide spectrum of applications
- MCCB sizes available from 16A to 1600A with various common frames and common accessories which simplifies use
- Customer fit accessories available to enable quick and easy configuration for almost all project types
- Basic or Advanced OCR's such AC/DC thermal magnetic, AC electronic, metering and communications types to suit varied installation requirements.
- Large stocks of MCCBs and accessories results in short lead times for users

SPECIFICATIONS

Compatible Product Series'	S160 E250 S250 E250NJ S250GJ S250NJ
Details, compatible product series	Except S250-PE
Component Type MCCB	Terminal Cover / Interpole Barrier
Number of Poles	3
Compatible Frame Size	160 AF Compat. 250 AF
Package Quantity	2
Length	55 mm

REFERENCES


IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Catalogue No: **T2CF253SLNG**

T2 TERMINAL COVER FC FOR E/S160-250 3P

Power Distribution and Protection > Circuit Breakers > Moulded Case Circuit Breakers > Terasaki TemBreak 2 Moulded Case Circuit Breakers > TemBreak 2 External Accessories 125 AF to 1600 AF > Terminal Covers and Barriers

NHP

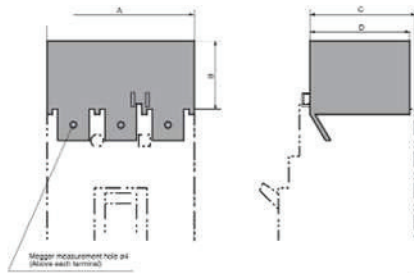

Dimensions (in mm)

Breaker	Connection	A			B			B ¹		C			D		
		1P	3P	4P	1P	3P	4P	3P	4P	1P	3P	4P	1P	3P	4P
E125, S125, ZS125	Front (long)	30	90	120	40	40	40	—	—	48	48	48	46	46	46
	Front (short)	—	90	120	—	22	22	—	—	48	48	—	46	46	—
	Tunnel clamp	30	90	120	2.5	2.5	2.5	6	62.5	61	61	61	60	59.5	59.5
S160	Front ¹⁾ (long)	35	105	140	55	55	55	—	—	54	54	54	52	52	52
E250, S250 (except S250-PE)	Front (short) ¹⁾	—	105	140	—	30	30	—	—	54	54	—	52	52	—
ZS250	Tunnel clamp	35	105	140	2.5	2.5	2.5	6	63	61	61	61	49.5	59.5	59.5
H125, L125, H160, L160	Front ¹⁾	—	105	140	—	55	55	—	—	89	89	—	87	87	—
H250, L250, S250-PE	Tunnel clamp	—	105	140	—	2.5	2.5	4.5	—	96	96	—	59.5	59.5	—
E400, S400	Front (wide)	—	140	185	—	110	110	—	—	97	99	—	96	98	—
E630NE, S630CE, S630GE	Front (wide)	—	180	240	—	110	114	—	—	97	99	—	96	98	—
	Front (narrow) ¹⁾	—	140	185	—	80	85	—	—	134	134	—	93	93	—
H400, L400	Tunnel clamp	—	140	185	—	3	3	4.5	—	97	97	—	93	93	—
	Front (wide)	—	180	240	—	110	114	—	—	134	136	—	96	98	—
	Tunnel clamp	—	140	185	—	3	3	4.5	—	134	134	—	93	93	—

Note: ¹⁾ Not applicable when flat bars (FB) are fitted.

Dimension Diagram

Technical Diagram