



T2 IP55 HANDLE 400AF

- Wide range of fault interruption ratings from 25 to 200kA to cater for a wide spectrum of applications
- MCCB sizes available from 16A to 1600A with various common frames and common accessories which simplifies use
- Customer fit accessories available to enable quick and easy configuration for almost all project types
- Basic or Advanced OCR's such AC/DC thermal magnetic, AC electronic, metering and communications types to suit varied installation requirements.
- Large stocks of MCCBs and accessories results in short lead times for users

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Compatible Product Series'	E400 E630 H400 L400 S400 S630
Details, compatible product series	E400, S400, H400, L400, E630, S630
Component Type MCCB	Handle / Mechanical Interlock
IP Rating	IP55
Material, Handle	Plastic Handle
Compatible Frame Size	400 AF Compat. 630 AF

REFERENCES


IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Catalogue No: **T2HS40R5GM**

T2 HANDLE IP55 FOR 400

Power Distribution and Protection > Circuit Breakers > Moulded Case Circuit Breakers > Terasaki TemBreak 2 Moulded Case Circuit Breakers > TemBreak 2 External Accessories 125 AF to 1600 AF > External Operators, Handles and Motors

NHP

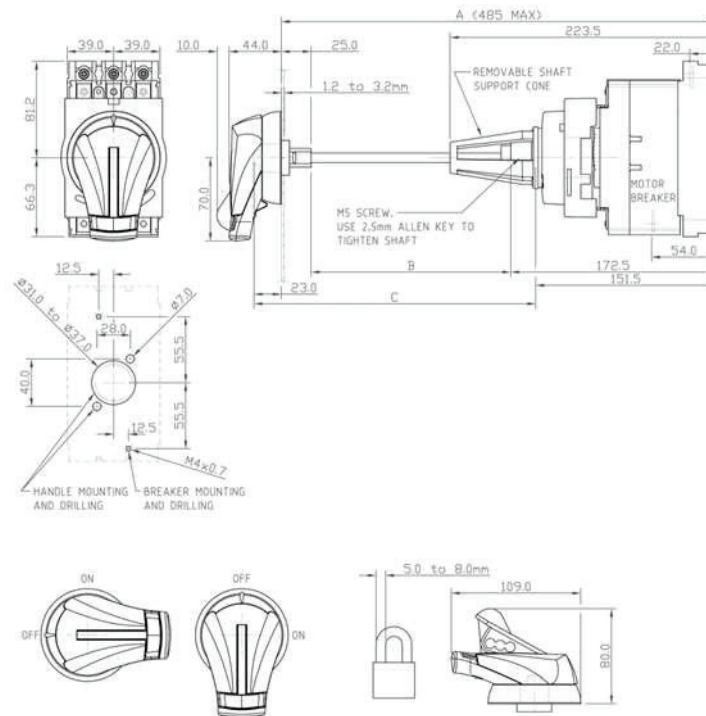

Dimension Diagram

Technical Diagram