

96647039 STRADALUX LED 2400 25W HF EL2 L840

LED 25W LED_2444	AS/NZS 60598	IP54	⚡	⚠	T _a 40	
------------------	--------------	------	---	---	-------------------	--

Stradalux

A robust weatherproof LED luminaire. Electronic, fixed output control gear with 2 hour, manual test, emergency lighting circuit. Body: die-cast aluminium. Visor: high impact resistant clear acrylic. Gasket: PVC foam. Class 1 electrical IP54. Complete with 4000K LED


Dimensions: 692 x 174 x 102 mm

Luminaire input power: 25 W


Weight: 0 kg



TLA_STRA_F_LEDPDB.jpg

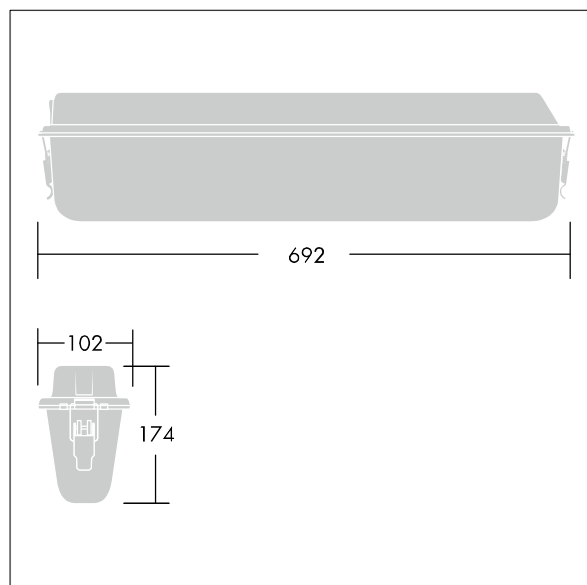

TLG_STRA_M_LD1.wmf

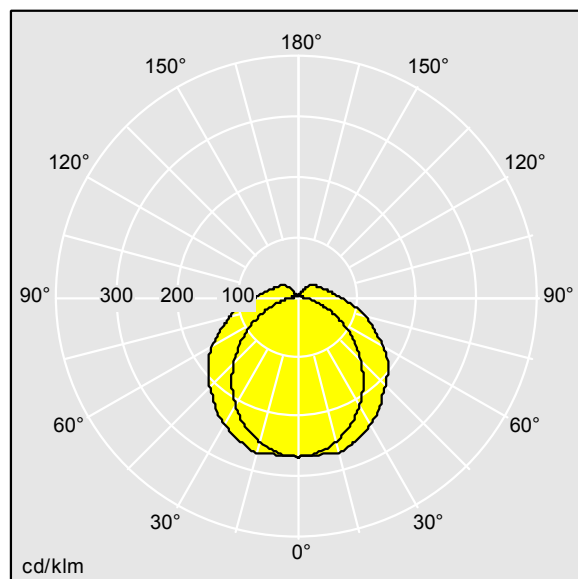

TLAU_96541088.idt

Lamp position: STD - standard

Light Source: LED

Luminaire luminous flux*: 2446 lm

Luminaire efficacy*: 98 lm/W

Lamp efficacy: 97 lm/W

Correlated colour temperature*: 4000 Kelvin

LOR: 1,00 ULOR: 0,13 DLOR: 0,87

Chromaticity tolerance (initial MacAdam)*: 5

Rated median useful life*:

50000h at 25°C

Ballast: 2x HF_Xitanium

Luminaire input power*: 25 W

Dimming: FO

Maintenance category: E - Dust-proof IP5X

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Colour temperature is subject to a tolerance of up to ± 150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.

© Thorn Lighting