

TRADE\$AVE

LED Highbay



Features

- Aluminium housing powder coated black
- Tempered glass lens
- Low profile design
- Surge protected 4kV Line-Line
- High efficiency SMD chip 130Lm/w
- Operating Temp: -30°C to +50°C
- IP65 rated


Dimming Options

- 240V leading, trailing & universal
- DALI


CERTIFICATION	IP RATING	DIMMABLE	PROTECTION	BOX CTN QTY
				1 2

DIMENSIONS (mm)

TSHB150W5K

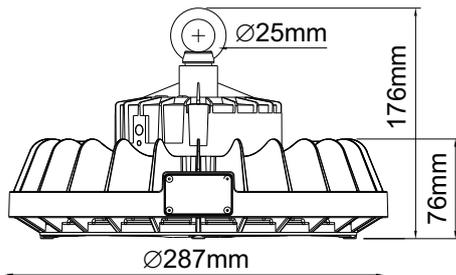

TSHB200W5K

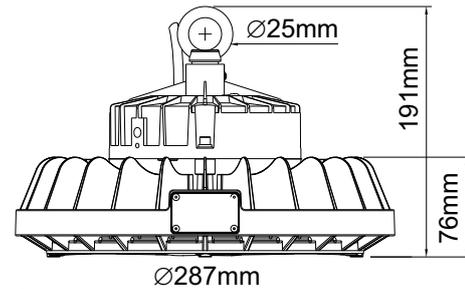

Part No.	Voltage AC	Watt	PF	CCT	Ra	Lumens	Beam Angle	Lifetime hrs	Fitting Colour	Dimensions (H x D)mm
TSHB150W5K	200-240V	150W	0.9	5000K	70	19,500	120°	50,000	Black	176 x 287
TSHB200W5K	200-240V	200W	0.9	5000K	70	26,000	120°	50,000	Black	191 x 287

Part No.	Model No.	VEET Status	IPART Status
TSHB150W5K	HB20-150	Pending	Pending
TSHB200W5K	HB20-200	Pending	Pending

1300 555 586
repelec.com.au



Facebook, Instagram, Twitter, YouTube icons
@RepelecAU