



Oyster Light

For ceilings & walls



Features

- Polycarbonate base & diffuser
- Slide switch function for colour temperature change
- High efficiency SMD chips
- Constant current driver
- Large terminals for easy installation
- Operating temp: -20°C to 45°C
- IP54 rated

Dimming Options


- Trailing and leading edge
- Universal

Includes

- Oyster with internal dimmable constant current driver
- Mounting accessories

CERTIFICATION	IP RATING	DIMMABLE
		

COLOUR CHANGE	BOX CTN QTY
	1 10

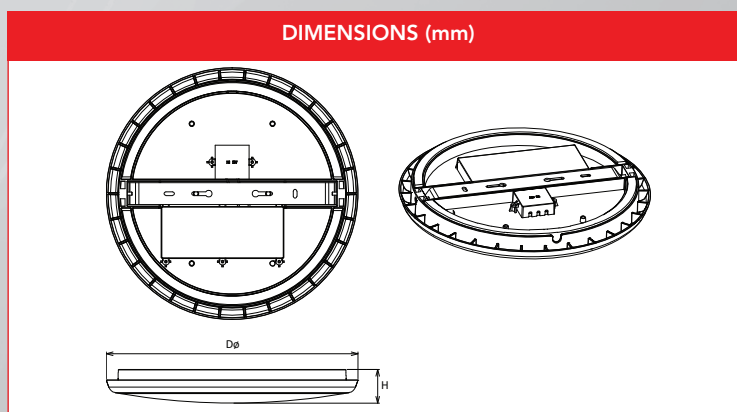

Part No.	Voltage	Watt	PF	CCT	Ra	Lumens	Beam Angle	Lifetime hrs	Fitting Colour	Dimensions (H x Dø)mm
TSOYS18WTRI	200-240V	18W	0.9	3000K, 4000K, 5700K	80	1620-1890-1855	120°	40,000	White	40 x 300
TSOYS25WTRI	200-240V	25W	0.9	3000K, 4000K, 5700K	80	2480-2700-2610	120°	40,000	White	40 x 350

Part No.	Model No.	VEET Status	IPART Status
TSOYS18WTRI	UP-AL08-12-18W-P3	Pending	Pending
TSOYS25WTRI	UP-AL08-14-25W-P3	Pending	Pending