




ECONOLED EA73

7 Watts / 865 Lumens / 85+ CRI



7W Recessed LED Downlight with low ceiling clearance, suitable for the replacement of existing low voltage MR16 downlights. Powered by a high output COB LED with high lumen outputs of 850 lm (3000K) and 865 lm (4000K) with a wide beam angle and a high CRI of 85+. Supplied with remote driver.

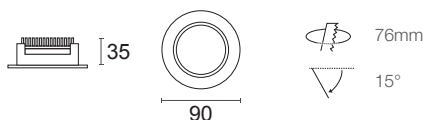

System Power 8.2W

Tilt-Angle 15°

LED Power 7W


Cut-Out 76mm

IP Rating IP20

Weight 160g

	3000K	4000K
COB Lumen Output	850 lm	865 lm
Total Luminous Flux	664 lm	679 lm

Efficacy	82.08 lm/W 4000K	Lifetime	50,000hrs (L70)		
Dimming	Leading + Trailing Edge				
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit	Power Factor	> 0.95

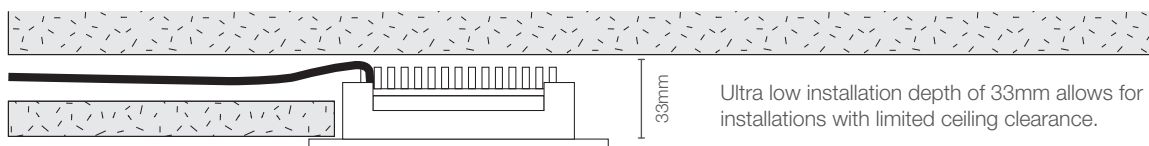

Ultra low installation depth of 33mm allows for installations with limited ceiling clearance.

Product

Description

EA731

Econoled 3000K White Trim

EA732

Econoled 4000K White Trim

Product

Description

EA735

Econoled 3000K Black Trim

EA736

Econoled 4000K Black Trim