


UTI-TIES

- Durable • Available in natural finish or weather resistant black
- Smooth edges to avoid cuts • Tapered tip for ease of use
- Self locking system resists slippage

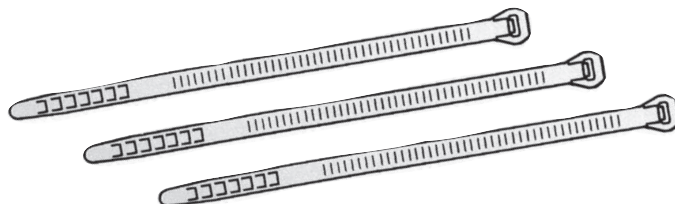

STANDARD NYLON TIES

NATURAL DESCRIPT.	CAT NO.	WEATHER RESISTANT DESCRIPT.	CAT NO.	LENGTH (mm)	WIDTH (mm)	MAX BUNDLE DIA (mm)	TENSILE STRENGTH (KG)	PACK QTY
CT802	H31800	CT802W	H31820	80	2.5	12	8	100/1000
CT1002	H31801	CT1002W	H31821	102	2.5	16	8	100/1000
CT1503	H31802	CT1503W	H31822	150	3.6	32	13	100/1000
CT2004	H31803	CT2004W	H31823	200	4.8	44	22	100/1000
CT3004	H31804	CT3004W	H31824	300	4.8	76	22	100/1000
CT3704	H31806	CT3704W	H31826	370	4.8	102	22	100/1000

HEAVY DUTY NYLON TIES

NATURAL DESCRIPT.	WEATHER RESISTANT DESCRIPT.	LENGTH (mm)	WIDTH (mm)	MAX BUNDLE DIA (mm)	TENSILE STRENGTH (KG)	PACK QTY
CT3807	CT3807W	380	7.6	102	54	100/1000
	CT5507W	550	7.6	160	54	100/1000

EXTRA HEAVY DUTY NYLON TIES

DESCRIPT.	LENGTH (mm)	WIDTH (mm)	MAX BUNDLE DIA (mm)	TENSILE STRENGTH (KG)	PACK QTY
CT55012W	550	12.7	160	110	100

STAINLESS STEEL CABLE TIES

DESCRIPT.	LENGTH (mm)	WIDTH (mm)	MAX BUNDLE DIA (mm)	TENSILE STRENGTH (KG)	PACK QTY
CT2004SS	200	4.6	50	44	100
CT3604SS	360	4.6	100	44	100
CT5204SS	520	4.6	150	44	100
CT6804SS	680	4.6	200	44	100

9

STAINLESS STEEL CABLE TIES – HEAVY DUTY

DESCRIPT.	LENGTH (mm)	WIDTH (mm)	MAX BUNDLE DIA (mm)	TENSILE STRENGTH (KG)	PACK QTY
CT2008SS	200	8	50	111	50
CT3608SS	360	8	100	111	50

CABLE TIE MOUNTS - 4 WAY

DESCRIPT.	LENGTH (mm)	WIDTH (mm)	HEIGHT	PACK QTY
TM19194	19	19	4	100
TM28284	28	28	4	100