
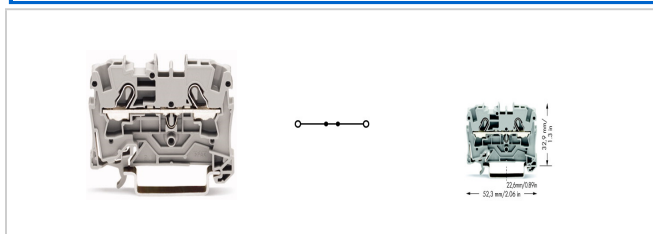


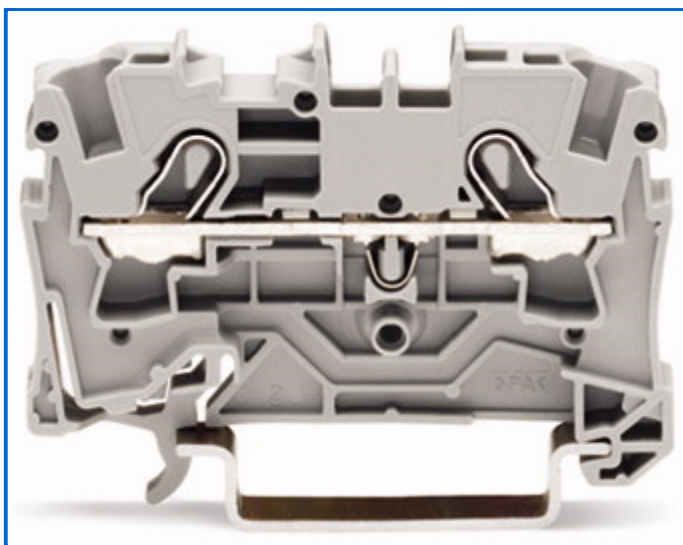

Item (Detail view)

**2-Conductor through terminal block; suitable for Ex e II applications**

Item no.	2004-1201  	GTIN / EAN	4017332071055
Content	1 piece	Order unit	piece
Order quantity	<input type="text" value="50"/> piece	Increase in order quantity	(50, 100, 150, 200, ...)
Customer item no.		Customs Tariff no.	85369010000
Customs duty for the country of origin	DE	Available	-
List price	On request	Net price	On request
Availability	On request		

Note: Some items may not be available from your local WAGO company.

Please note that the quantities ordered in the shopping cart are rounded up to the PU (SPU).

RoHS 
Compliant

2-Conductor through terminal block; suitable for Ex e II applications
[Articledetails](#)
[Approbations](#)
[Downloads](#)
[Accessories](#)

Description 2-Conductor through terminal block; suitable for Ex e II applications
Remarks

Item properties

Miscellaneous

Name	Value	Unit
Total number of connection points	2	
Total number of potentials	1	
Color	gray	
Ratings according to 1	IEC/EN 60947-7-1	
Pollution degree (1)	3	
Rated voltage EN (1) [V]	800	V
Rated surge voltage (1) [kV]	8	kV
Nominal current [A]	32	A
Nominal current (2) [A]	41	A
Rated voltage EN (Ex e II) [V]	550	V
Nominal current (Ex e II) [A]	30	A
Connection technology (1)	Push-in CAGE CLAMP®	
Nominal cross section 1	4 mm ²	
Solid sizes 1	0.5 ... 6 mm ² / 20 ... 10 AWG	

2-Conductor through terminal block; suitable for Ex e II applications

Fine-stranded wires 1	0.5 ... 6 mm ² / 20 ... 10 AWG	
Strip length 1	11 ... 13 mm / 0.43 ... 0.51 in	
Type of wiring	Front-entry wiring	
Design	horizontal	
Marking level	Center/Side marking	
Insulating material	PA 6.6 V0	
Fire load [MJ]	0.135	MJ
Weight [g]	7.025	g
Width	6.2 mm / 0.244 in	
Height from upper-edge of DIN-rail	32.9 mm / 1.295 in	
Length	52.3 mm / 2.059 in	
Type of mounting	DIN 35 rail	

[Upwards](#)