


Item (Detail view)



Ferrule; sleeve for 4 mm² / awg 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

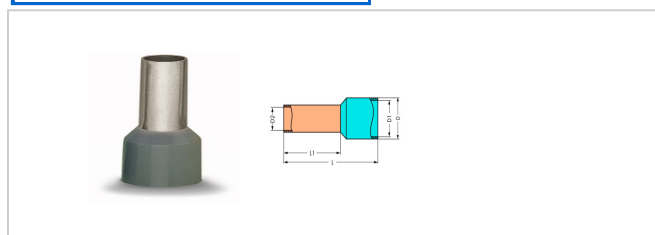

Item no.	216-207	GTIN / EAN	4017332277525
Content	1 piece	Order unit	piece
Order quantity	<input type="text" value="100"/> piece	Increase in order quantity	(100, 200, 300, 400, ...)
Customer item no.		Customs Tariff no.	85369010000
Customs duty for the country of origin	DE	Available	-
List price	On request	Net price	On request
Availability	On request		

Note: Some items may not be available from your local WAGO company.

Please note that the quantities ordered in the shopping cart are rounded up to the PU (SPU).

Ferrule; sleeve for 4 mm² / awg 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

RoHS ✓
Compliant

Article details		Approbations		Downloads	
Description	Ferrule; sleeve for 4 mm² / awg 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90				
	Remarks				
Miscellaneous					
Item properties	Name	Value	Unit		
	Color	gray			
	Fire load [MJ]	0.003	MJ		
	Weight [g]	0.27	g		
	Diameter [mm]	5.4	mm		
	Diameter 1 [mm]	4.8	mm		
	Diameter 2 [mm]	2.9	mm		
	Length [mm]	16.8	mm		
	Length 1 [mm]	9.5	mm		

[Upwards](#)