

Data sheet | Item number: 773-108
PUSH WIRE® connector for junction boxes; 8-conductor terminal block;
transparent housing; dark gray cover




www.wago.com/773-108



RoHS
Compliant



Color: ■

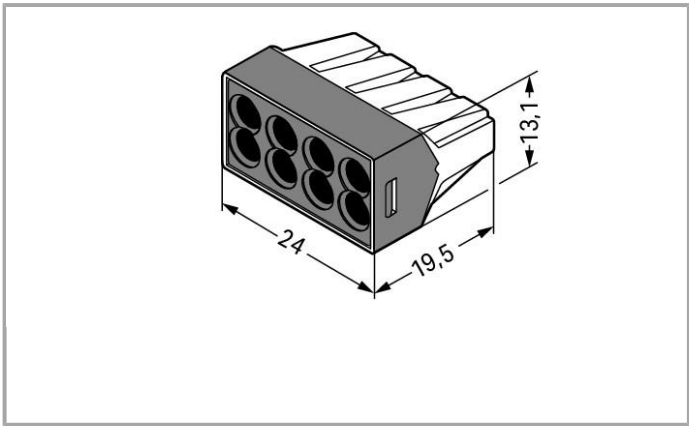

Data
Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (II / 2)	400 V
Rated impulse voltage (II / 2)	4 kV
Rated current	24 A
Legend (ratings)	(II / 2) ≙ Overvoltage category II / Pollution degree 2



Connection data

Connection technology	PUSH WIRE®
Actuation type	Push-in
Connectable conductor materials	Copper Aluminum
Solid conductor	0.75 ... 2.5 mm² / 18 ... 12 AWG
Stranded conductor	1.5 ... 2.5 mm² / 16 ... 12 AWG
Strip length	12 mm / 0.47 Inch
Total number of connection points	8
Total number of potentials	1
Type of wiring	Side-entry wiring

Geometrical Data

Width	24 mm / 0.945 inch
Height	13.1 mm / 0.516 inch
Depth	19.5 mm / 0.768 inch

Material Data

Color	dark gray
Cover color	dark gray
Flammability class per UL94	V2
Fire load	0.099 MJ
Weight	4.605 g

Environmental Requirements

Surrounding air (operating) temperature	60 °C
---	-------

Commercial data

Country of origin	CN
GTIN	4044918397735
Product Group	7 (Push Wire Conn.)

Downloads

smartDATA

CAD data

3D Download 773-108	URL	Download
---------------------	-----	----------



Subject to changes.

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +61 (0)3 8791 6300.