
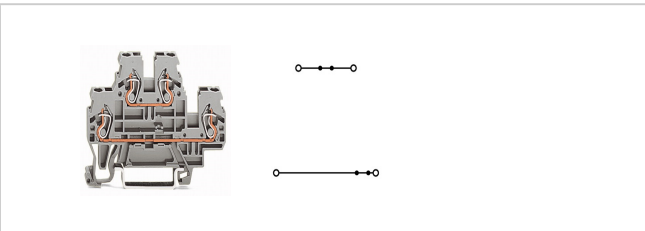


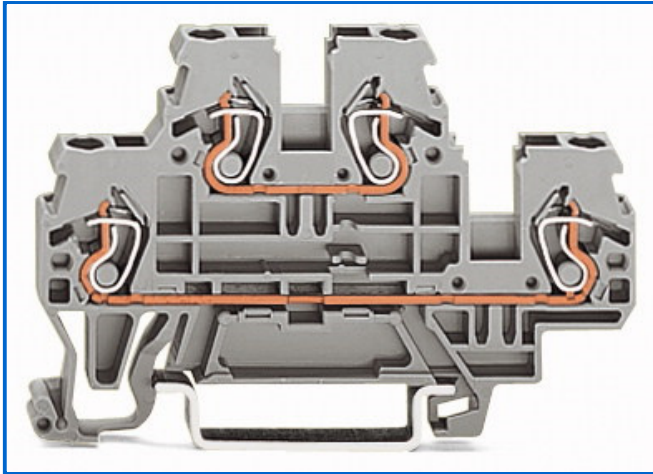


Item (Detail view)

**Double-deck terminal block; Through/through terminal block; L/N; gray housing**

Item no.	870-503  	GTIN / EAN	4044918630894
Content	1 piece	Order unit	piece
Order quantity	<input type="text" value="50"/> piece	Increase in order quantity	(50, 100, 150, 200, ...)
Customer item no.		Customs	85369010000
Customs duty for the country of origin	DE	Tariff no.	
List price	On request	Available	-
Availability	On request	Net price	On request

Note: Some items may not be available from your local WAGO company.

Please note that the quantities ordered in the shopping cart are rounded up to the PU (SPU).

RoHS 
Compliant



Double-deck terminal block; Through/through terminal block; L/N; gray housing
[Article details](#)
[Approbations](#)
[Downloads](#)
[Accessories](#)

Description Double-deck terminal block; Through/through terminal block; L/N; gray housing

Remarks

Item properties

Miscellaneous

Name	Value	Unit
Total number of connection points	4	
Total number of potentials	2	
Number of levels	2	
Color	gray	
Ratings according to 1	IEC/EN 60947-7-1	
Pollution degree (1)	3	
Rated voltage EN (1) [V]	500	V
Rated surge voltage (1) [kV]	6	kV
Nominal current [A]	24	A
Connection technology (1)	CAGE CLAMP [®] COMPACT	
Solid sizes 1	0.08 ... 2.5 mm ² / 28 ... 12 AWG	
Fine-stranded wires 1	0.08 ... 4 mm ² / 28 ... 12 AWG	
Strip length 1	6 ... 7 mm / 0.24 ... 0.28 in	
Type of wiring	Front-entry wiring	
Design	horizontal	

Double-deck terminal block; Through/through terminal block; L/N; gray housing

Marking level	Side marking	
Fire load [MJ]	0.168	MJ
Weight [g]	10.068	g
Width	5 mm / 0.197	in
Height from upper-edge of DIN-rail	40 mm / 1.575	in
Length	70 mm / 2.756	in
Type of mounting	DIN 35 rail	
Safety information 1	Max. insulation diameter: 4.4mm	

[Upwards](#)