





Item (Detail view)

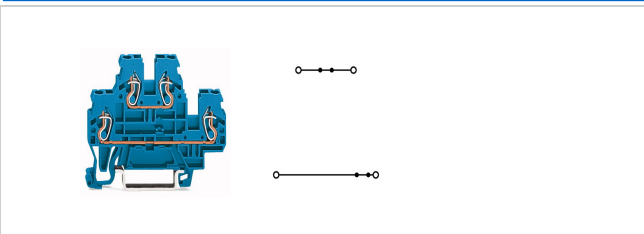

Double-deck terminal block; Through/through terminal block; N/N; blue housing; suitable for Ex i applications

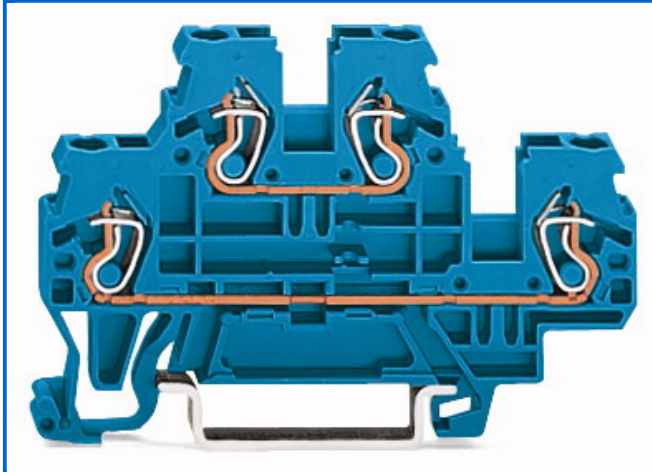

Item no.	870-504  	GTIN / EAN	4044918630917
Content	1 piece	Order unit	piece
Order quantity	<input type="text" value="50"/> piece	Increase in order quantity	(50, 100, 150, 200, ...)
Customer item no.		Customs Tariff no.	85369010000
Customs duty for the country of origin	DE	Available	-
List price	On request	Net price	On request
Availability	On request		

Note: Some items may not be available from your local WAGO company.
Please note that the quantities ordered in the shopping cart are rounded up to the PU (SPU).

RoHS 
 Compliant

Double-deck terminal block; Through/through terminal block; N/N; blue housing; suitable for Ex i applications

Article details		Approbations		Downloads		Accessories	
Description		Double-deck terminal block; Through/through terminal block; N/N; blue housing; suitable for Ex i applications					
Remarks							
Item properties							
Miscellaneous							
Name		Value		Unit			
Total number of connection points		4					
Total number of potentials		2					
Number of levels		2					
Color		blue					
Ratings according to 1		IEC/EN 60947-7-1					
Pollution degree (1)		3					
Rated voltage EN (1) [V]		500		V			
Rated surge voltage (1) [kV]		6		kV			
Nominal current [A]		24		A			
Connection technology (1)		CAGE CLAMP® COMPACT					
Solid sizes 1		0.08 ... 2.5 mm² / 28 ... 12 AWG					
Fine-stranded wires 1		0.08 ... 4 mm² / 28 ... 12 AWG					
Strip length 1		6 ... 7 mm / 0.24 ... 0.28 in					
Type of wiring							

Double-deck terminal block; Through/through terminal block; N/N; blue housing; suitable for Ex i applications

	Front-entry wiring	
Design	horizontal	
Marking level	Side marking	
Fire load [MJ]	0.166	MJ
Weight [g]	9.873	g
Width	5 mm / 0.197 in	
Height from upper-edge of DIN-rail	40 mm / 1.575 in	
Length	70 mm / 2.756 in	
Type of mounting	DIN 35 rail	
Safety information 1	Max. insulation diameter: 4.4mm	

[Upwards](#)