





## Item (Detail view)

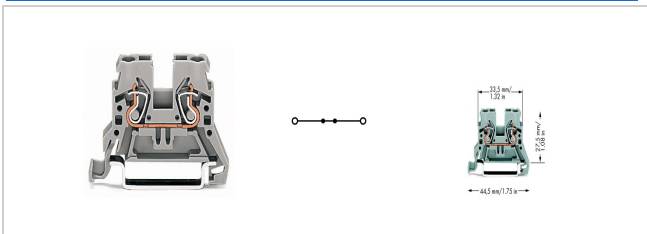

## 2-Conductor through terminal block

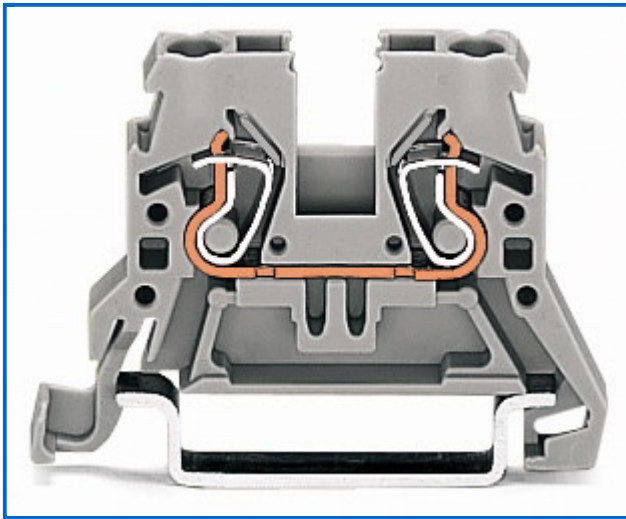

Item no.	870-901  	GTIN / EAN	4044918478250
Content	1 piece	Order unit piece	
Order quantity	<input type="text" value="100"/> piece	Increase in order quantity	(100, 200, 300, 400, ...)
Customer item no.		Customs Tariff no.	85369010000
Customs duty for the country of origin	DE	Available	-
List price	On request	Net price	On request
Availability	On request		

**Note: Some items may not be available from your local WAGO company.**

**Please note that the quantities ordered in the shopping cart are rounded up to the PU (SPU).**

RoHS   
Compliant

**2-Conductor through terminal block**

Article details

Approbations

Downloads

Accessories

**Description** 2-Conductor through terminal block  
**Remarks**

**Item**  
**properties**

**Miscellaneous**

<b>Name</b>	<b>Value</b>	<b>Unit</b>
Total number of connection points	2	
Total number of potentials	1	
Color	gray	
Ratings according to 1	IEC/EN 60947-7-1	
Pollution degree (1)	3	
Rated voltage EN (1) [V]	500	V
Rated surge voltage (1) [kV]	6	kV
Nominal current [A]	24	A
Connection technology (1)	CAGE CLAMP® COMPACT	
Solid sizes 1	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG	
Fine-stranded wires 1	0.08 ... 4 mm <sup>2</sup> / 28 ... 12 AWG	
Strip length 1	6 ... 7 mm / 0.24 ... 0.28 in	
Type of wiring	Front-entry wiring	
Design	horizontal	
Marking level	Side marking	
	PA 6.6 V0	

**2-Conductor through terminal block**

Insulating material		
Fire load [MJ]	0.08	MJ
Weight [g]	4.303	g
Width	5 mm / 0.197 in	
Height from upper-edge of DIN-rail	27.5 mm / 1.083 in	
Length	44.5 mm / 1.752 in	
Type of mounting	DIN 35 rail	
Safety information 1	Max. insulation diameter: 4.4mm	

[Upwards](#)