



12-FRE

SURFACE FIRE RATED ENCLOSURE

12-FRE

Fire resistant enclosure for installation in fire performance walls.

SPECIFICATIONS

DIMENSIONS	H46 x W123 x D63 mm
MATERIAL	STEEL
REGION	AU/NZ
APPLICATION	INTERIOR
WEIGHT	166.02 g
CAPSULE CUTOUT	H35 X W120 mm
IP RATING	IP20
MINIMUM MOUNTING DEPTH	70 mm
MOUNTING SUBSTRATE	FIRE RESISTANT PLASTERBOARD

STANDARDS	AS/NZS 3112, 3100, 60951, 1530.4
COMPLIANCE NUMBER	IGNL-5157-04-02
PRODUCT CERTIFICATION	FIRE RESISTANCE TESTING
PATENT	PATENT PENDING


COLOUR



STEEL

COMPATIBLE PRODUCT INDEX

	PRODUCT	SKU
	SURFACE DOUBLE OUTLET	12-O
	SURFACE SINGLE GANG SWITCH GRID	12-1S
	SURFACE TWO GANG SWITCH GRID	12-2S
	SURFACE THREE GANG SWITCH GRID	12-3S
	SURFACE FOUR GANG SWITCH GRID	12-4S

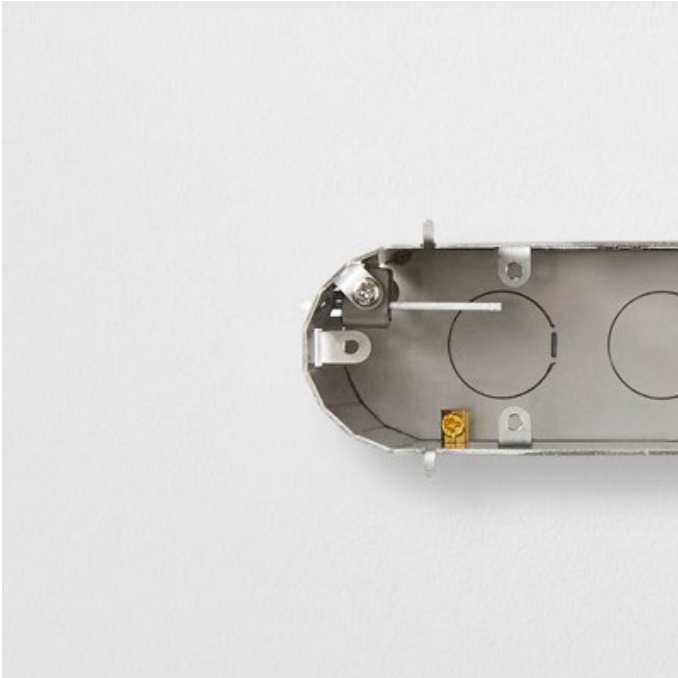

12-FRE / INTERNAL DETAILS

ORDER GUIDE

	SERIES	TYPE
E.G.	12	FIRE RATED ENCLOSURE
CODE	12	- FRE

PACKAGING SPECIFICATIONS

INDIVIDUAL PACK SIZE	D70 X W150 X H50 mm
GROUP PACK PCS	-
GROUP PACK SIZE	-
BULK PACK PCS	72
BULK PACK SIZE	D300 X W470 X H320 mm

INSTALLATION



Get on-site help - Scan the QR code for detailed installation instructions on this product and more.

zetr.com.au/installation

