


# Restrained Range 300A 3300V quick-loc receptacle

## Ordering Codes

| Part Number     | Description                                                     |
|-----------------|-----------------------------------------------------------------|
| 300-40Q-3300    | 300A 3300V Quick-Loc Receptacle with 95mm <sup>2</sup> 1.3 Lead |
| 300-40Q-3300R   | 300A 3300V Quick-Loc Receptacle with 95mm <sup>2</sup> Thimbles |
| 300-40Q-3300RGB | 300A 3300V Quick-Loc Receptacle with Gland & Bracket            |

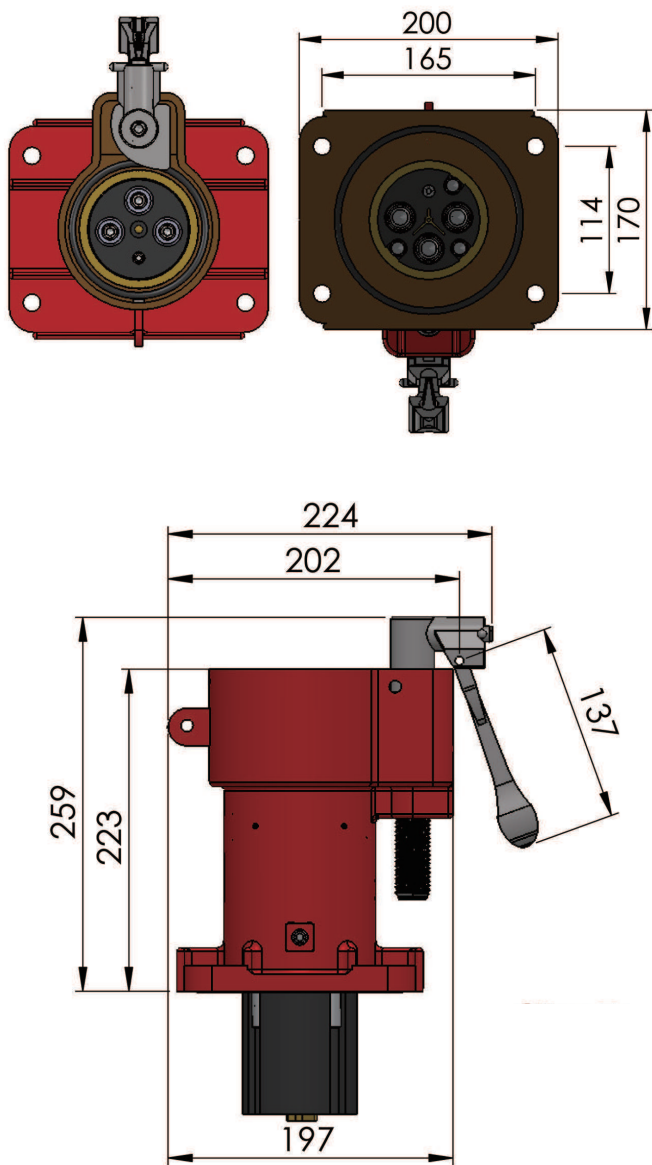

## Thimble Kit (table 1)

| Part Number   | Cable CSA                 |
|---------------|---------------------------|
| 300-40-1000RR | 50mm <sup>2</sup>         |
| 300-40-1200RR | 70mm <sup>2</sup>         |
| 300-40-1300RR | 95mm <sup>2</sup>         |
| 300-40-1500RR | 120mm <sup>2</sup>        |
| 300-40-1700RR | 150mm <sup>2</sup>        |
| 300-40-1900RR | 150mm <sup>2</sup> solder |
| 300-40-2100RR | 185mm <sup>2</sup>        |

Each Thimble Kit consists of:

- 3 x Main thimbles
- 3 x Earth blocks
- 1 x Pilot thimble

All with their respective screws and washers

## Grommet (table 2)

| Part Number | Cable O.D. |
|-------------|------------|
| 300-10-3000 | 25-30mm    |
| 300-10-3500 | 30-35mm    |
| 300-10-4000 | 35-40mm    |
| 300-10-4500 | 40-45mm    |
| 300-10-5000 | 45-50mm    |
| 300-10-5500 | 50-55mm    |
| 300-10-6000 | 55-60mm    |
| 300-10-6500 | 60-65mm    |
| 300-10-7000 | 65-70mm    |
| 300-10-7500 | 70-75mm    |
| 300-10-8100 | 76-81mm    |



Colour and Orientation for Voltage

Material: Manganese Bronze /EPR Rubber  
 Weight: Approx. 14.1kg  
 Compliance: AS/NZS1299

### Spare Parts

To order spare parts, please identify from exploded view drawing & refer to appropriate table

| Item | Part Number     | Description             | QTY. |
|------|-----------------|-------------------------|------|
| 1    | 300-40Q-3003    | Housing 3300V           | 1    |
| 2    | 300-40-3004R    | Interior c/w Pins       | 1    |
| 3    | 300-41Q-0002    | Quick-Loc Jacking Screw | 1    |
| 4    | 300-40-9003     | Dust Plug               | 1    |
| 5    | 301-40-3010     | Main Pin                | 3    |
| 6    | 301-40-3011     | Shroud                  | 3    |
| 7    | See Table 1     | Main Thimble            | 3    |
| 8    | See Table 1     | Earth Block             | 3    |
| 9    | See Table 1     | Pilot Thimble           | 1    |
| 10   | 195-300-0040    | O-Ring                  | 1    |
| 11   | 195-05-0146     | O-Ring                  | 1    |
| 12   | 990-006-0012    | Side Screw              | 2    |
| 13   | 950-604-1030-CP | Copper Washer           | 2    |

### RGB Parts

| Item | Part Number     | Description       | QTY. |
|------|-----------------|-------------------|------|
| 14   | 301-40-0041-RD  | RGB Housing 3300V | 1    |
| 15   | 300-10-9002     | TRS Gland         | 1    |
| 16   | 300-40-0020     | Bracket           | 1    |
| 17   | 195-05-0146     | O-Ring            | 1    |
| 18   | See Table 2     | Grommet           | 1    |
| 19   | 990-010-0035-HT | Gland Bolt        | 2    |
| 20   | 990-006-0012    | Side Screw        | 3    |
| 21   | 300-40-0021     | Earth Strap       | 1    |

