

# Catalogue No: **KTA7-25S-20A**

## MOTOR PROTECTION CIRCUIT BREAKER 16-20A

Motor Control and Drives > Motor Starting and Protection > Motor Protection Circuit Breakers > Sprecher + Schuh Motor Protection Circuit Breakers > KTA7 Motor Protection Circuit Breakers > KTA7-25S...32S Motor Protection Circuit Breakers



Representative Photo Only  
(actual product may vary based on configuration selections)

### Motor Protection circuit breaker 14.5...20 Amp

- Trip position: separate handle position indicates a trip has occurred, for easy identification
- Short circuit trip indication: identifies a short circuit trip, enabling operators to identify a fault quickly, reducing downtime
- Front mount auxiliary contacts require no additional panel space

#### SPECIFICATIONS

Component Type Motor Control and Drives	Motor Protection Circuit Breaker
Approx. kW (AC 3, 400/415 V AC)	7.5...10 kW
Ie, rated operational current, nom	20 A
Ir, Thermal Trip Current, Min	14.5 A
Ir, Thermal Trip Current, Max	20 A
Im, Magnetic Trip Current	260 A
Icu, Rated Ultimate Short-Circuit Breaking Capacity, 400V AC	50 kA
Icu, Rated Ultimate Short-Circuit Breaking Capacity, 415V AC	50 kA
Ics, Rated Service Short-Circuit Breaking Capacity, 400V AC	15 kA
Ics, Rated Service Short-Circuit Breaking Capacity, 415V AC	15 kA
IP Rating	IP20


#### REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

# Catalogue No: **KTA7-25S-20A**

## MOTOR PROTECTION CIRCUIT BREAKER 16-20A

Motor Control and Drives > Motor Starting and Protection > Motor Protection Circuit Breakers > Sprecher + Schuh Motor Protection Circuit Breakers > KTA7 Motor Protection Circuit Breakers > KTA7-25S...32S Motor Protection Circuit Breakers

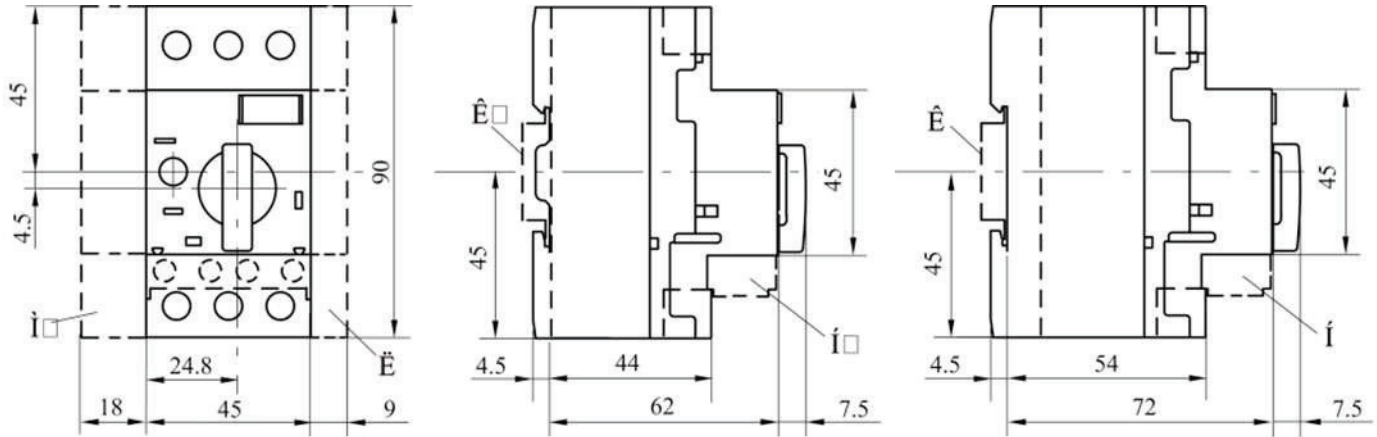

Dimension Diagram