



RCBO SAFE-T 1P 16A 30mA with Eaton/Quicklag Adaptor

- Approval No. NSW15251 or RCM
- Current ratings 10A, 16A and 20A
- 10mA and 30mA sensitivities
- Available with different adaptors to suit NHP (CT), Heinemann and Eaton (Quicklag) busbar chassis
- Perfect for retro fit or new installations - 1P width

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Component Type MCBs RCDs RCBOs	RCBO
RCD Type, AS/NZS 61008/61009	AC
Poles	1P
Approval Number	NSW 15251
Busbar System, Top	Fork
Busbar System, Bottom	Fork
Trip-Free Mechanism	Yes
Mounting	Clip Tray
Padlockable	Yes, Captive only (Ordered Separately)
Sealable	No
Centre Trip Position	Yes
Operating Temperature, min	-25 °C min
Operating Temperature, Max	55 °C max
Storage Temperature, min	-25 °C min
Storage Temperature, max	55 °C max
Relative humidity, max	95 %RH
Shock Rating	IEC 60077-16-3
Vibration Rating	IEC 60068-2-6
Standards Compliance	AS/NZS 3111 AS/NZS 3190


Catalogue No: **SRCB1630WA**

RCBO SAFE-T 1P 16A 30mA WITH EATON/QUICKLAG ADAPTOR

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > Safe-T Residual Current Device > Safe-T Single Pole Width RCBO (SRCB) > SRCB Pre-Fitted with Adaptor



REFERENCES	
IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

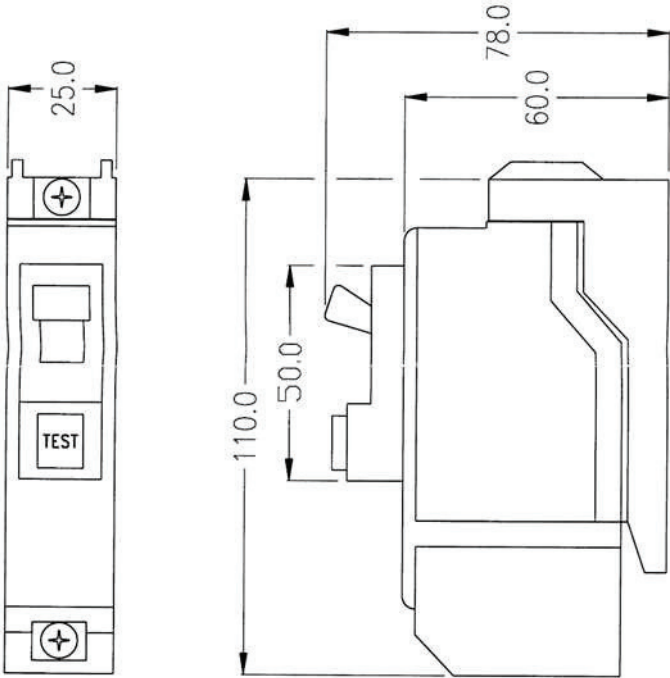


Dimension Diagram

Catalogue No: **SRCB1630WA**

RCBO SAFE-T 1P 16A 30mA WITH EATON/QUICKLAG ADAPTOR

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > Safe-T Residual Current Device > Safe-T Single Pole Width RCBO (SRCB) > SRCB Pre-Fitted with Adaptor


NHP

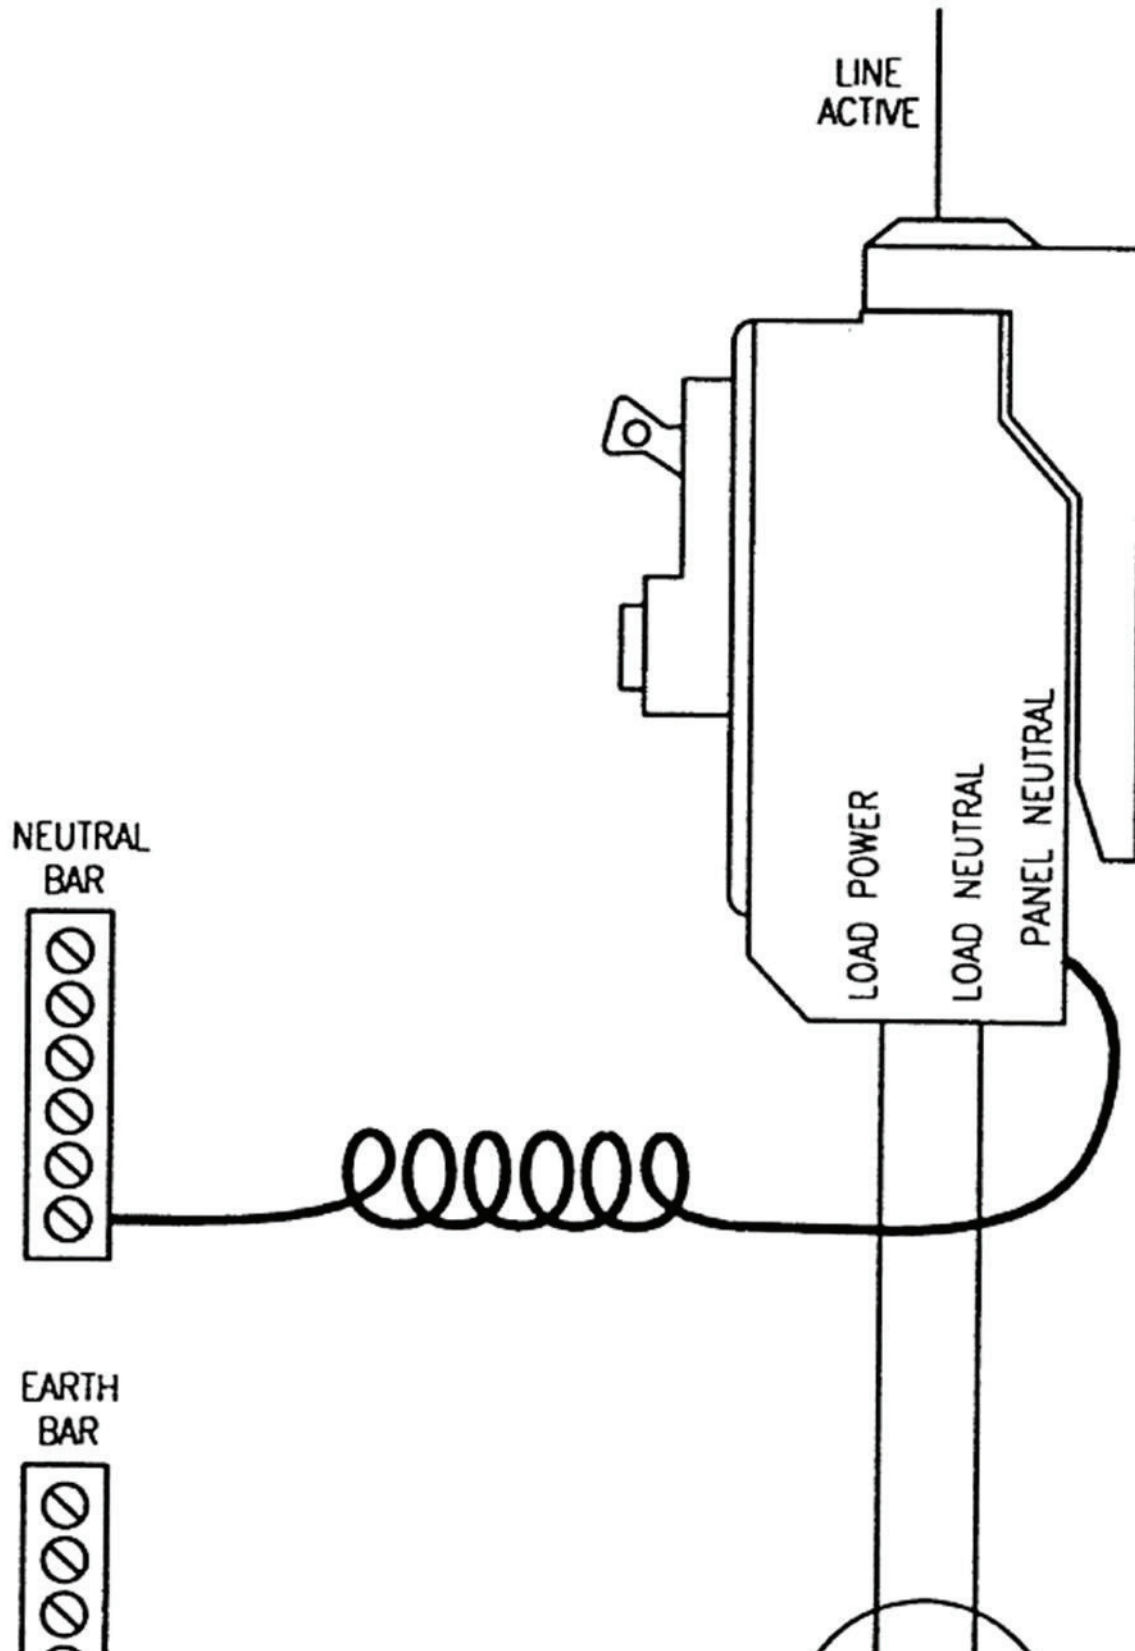

Catalogue No: **SRCB1630WA**

RCBO SAFE-T 1P 16A 30mA WITH EATON/QUICKLAG ADAPTOR

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > Safe-T Residual Current Device > Safe-T Single Pole Width RCBO (SRCB) > SRCB Pre-Fitted with Adaptor

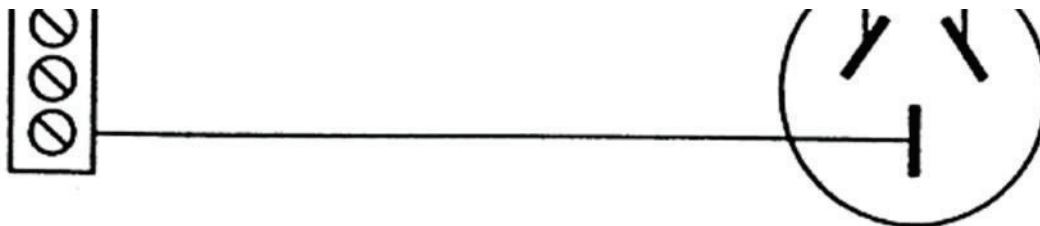

Connection / Wiring Diagram