

VERSA-300-ELID

LED Bunker Light



Description

The VERSA Series Wall Light has been designed to offer a versatile all-in-one product for exterior walls or ceilings.

Brightness levels can be selected from low, medium to high brightness with a wattage switchable dip switch from 15W to 18W to 25W depending on the desired brightness. Also incorporates TRIO technology, the added option of changing the colour temperature output via a dip switch. Switchable colour temperature allows for the choice of a Warm White, Neutral White or White colour temperature appearance.

Smart installation features have been incorporated for quicker and easier installation. Side conduit entry points are ideal for ease of installation as well as a large 20mm centre feed entry point at the back of the fitting. Wall or ceiling mountable. Class II rating allows for installation without an earth.


VERSA is also available in a black or white polycarbonate frame, with the choice of a plain or eyelid fascia to suit the application and appearance. Robust in design and construction with an IK10 rating, and an IP65 polycarbonate construction to be able to withstand the harsh coastal climate. Backed by our 3 Year Replacement Warranty.

Specification Features

Input Voltage:	240V
Power (W):	15W - 18W - 25W (Switchable)
IP rating (IP):	IP65
15W Lumens (lm):	Warm White 3000K - 830lm Neutral White 4000K - 850lm White 5700K - 1250 - 880lm
18W Lumens (lm):	Warm White 3000K - 940lm Neutral White 4000K - 990lm White 5700K - 1050lm
25W Lumens (lm):	Warm White 3000K - 1250lm Neutral White 4000K - 1320lm White 5700K - 1400lm
LED type:	SMD
CCT:	3000K - 4000K - 5700K (Switchable)
CRI:	≥80
Beam angle (°):	110°
Dimmable:	No
Lifespan (hrs):	50,000hrs
IK Rating:	IK08



Diagrams / Additional

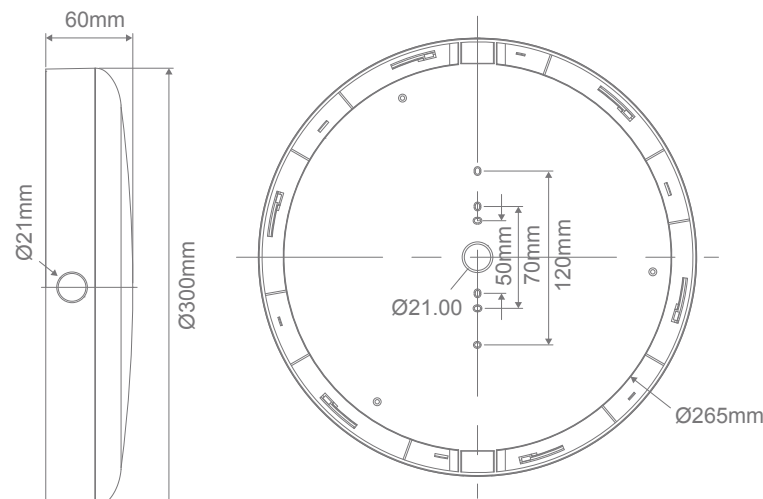

Item No.	Variant	Colour
VERSA-300-ELID-BLK	19804	TRIO
VERSA-300-ELID-WHT	19806	TRIO

