

Lynx-CFTE-FSD/4 Pin




Features

- > FSD = Fast Start Dimmable lamps
- > Excellent colour rendering – Ra85/Class 1B
- > To be operated on electronic ballasts only
- > Suitable for fast start emergency lighting
- > Suitable for dimming applications on approved dimmable electronic ballast
- > Lamp should be initially operated at full power for 100 hrs prior to any dimming of lamp
- > Average rated life: 10000 hours

Lynx Compact Fluorescent Lamp

The Lynx CFTE-FSD = Fast Start Dimmable lamps, provide excellent colour rendering – ra85/Class 1B and are to be operated on electronic ballasts only. Suitable for fast start emergency lighting and for dimming applications on approved dimmable electronic ballast. The Lynx CFTE-FSD lamps should be initially operated at full power for 100 hrs prior to any dimming of the lamp.

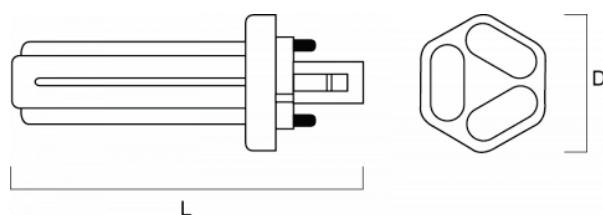

GX24q	13W	18W	26W	32W	42W
L	108	97	112	128	149
D	49	49	49	49	49

Lynx-CFTE-FSD/4 Pin

Description	Watts	Volts	Base	Colour Temp	Lumen	Order code
Lynx-CFTE/42W/840/FSD	42 W	240 V	GX24q-4	4 000 K	3200 lumens	278610
Lynx-CFTE/32W/840/FSD	32 W	240 V	GX24q-3	4 000 K	2400 lumens	278580
Lynx-CFTE/26W/840/FSD	26 W	240 V	GX24q-3	4 000 K	1800 lumens	278550
Lynx-CFTE/18W/840/FSD	18 W	240 V	GX24q-2	4 000 K	1200 lumens	278520
Lynx-CFTE/13W/840/FSD	13 W	240 V	GX24q-1	4 000 K	900 lumens	278515
Lynx-CFTE/42W/830/FSD	42 W	240 V	GX24q-4	3 000 K	3200 lumens	278600
Lynx-CFTE/32W/830/FSD	32 W	240 V	GX24q-3	3 000 K	2400 lumens	278570
Lynx-CFTE/26W/830/FSD	26 W	240 V	GX24q-3	3 000 K	1800 lumens	278540
Lynx-CFTE/18W/830/FSD	18 W	240 V	GX24q-2	3 000 K	1200 lumens	278510
Lynx-CFTE/13W/830/FSD	13 W	240 V	GX24q-1	3 000 K	900 lumens	278505